



2015 WIKA USA

Manufacturer's Suggested Retail Price List

Electronic Pressure Measurement

Effective January 1, 2015

2015 WIKA USA Manufacturer's Suggested Retail Price List

Electronic Pressure Measurement

Effective January 1, 2015

TERMS AND CONDITIONS

Terms and Conditions of Sale and Return Material Authorizations (RMA) are available from the WIKA website at www.wika.com. Prices are subject to change without prior notice.

PRODUCT SPECIFICATIONS

The 2015 WIKA USA MSRP List supersedes all previous price lists. Product specifications are subject to change without prior notice. Please visit the WIKA website for the most up-to-date information.

 is a registered trademark of Underwriter's Laboratories.

 is a registered trademark of Underwriter's Laboratories.

XSEL® is a registered trademark of WIKA Instrument LP.

air2guide™ is a registered trademark of WIKA Instrument LP.

Halocarbon® is a registered trademark of the Halocarbon Products Corporation.

Hastelloy® is a registered trademark of the Cabot family of companies.

Fluorolube® is a registered trademark of the Hooker Chemical & Plastics Corporation.

Monel® and Inconel® are registered trademarks of the INCO family of companies.

Viton® & Teflon® are registered trademarks of the E.I. DuPont family of companies.

Lexan® is a registered trademark of SABIC Innovative Plastics.



WIKAI and the WIKAI design are trademarks and registered servicemarks of WIKA Instrument LP. ©2015 WIKA Instrument LP. All rights reserved.

TABLE OF CONTENTS

List Prices Effective, January 1, 2014

ELECTRONIC MEASUREMENT

General Purpose

S-20	Standard Industrial	2
S-10	Standard Industrial	6
S-11	Standard Industrial, Flush Diaphragm	10
F-20	Field Case, NEMA 4X	14
F-21	Field Case, NEMA 4X, Flush Diaphragm	17
C-10	Compact Design	20
A-10	All Purpose Design	24
OT-1	OEM Industrial	27
DG-10	Digital Gauge	29
PSD-30	Pressure Switch with Display	32
TSD-30	Temperature Switch with Display	35
LSD-30	Liquid Level Switch with Display	36

Hazardous Area

E-10	Explosion-proof	37
E-11	Explosion-proof, Flush Diaphragm	40
N-10	Non-incendive	43
N-11	Non-incendive, Flush Diaphragm	46
IS-20, IS-20-F	Intrinsically-safe	49
IS-21, IS-21-F	Intrinsically-safe, Flush Diaphragm	53
IS-20-VR	Intrinsically-safe, Vapor Recovery	57

Submersible Liquid Level

LS-10	Liquid Level Submersible	58
LH-10	Liquid Level Submersible, High Performance	59
LH-20	Liquid Level Submersible, High Performance	62
IL-10	Liquid Level Submersible, Intrinsically-safe	64

Special Purpose

MH-2	OEM, Mobile Hydraulics	66
UPT-2X (UPT-20, UPT-21)	Universe Process Transmitter, Flush Diaphragm	68
HP-2	High Pressure	72
P-30	High Precision	74
P-31	High Precision, Flush Diaphragm	76
R-1	OEM, Refrigeration	78
AC-1	OEM, HVAC	80
TTF-1	OEM, Thin Film Sensor	82

Meters & Displays

A-AI-1	Attachable Loop Indicator	83
DI-15	Digital Indicator	83

3A Sanitary

S-10-3A	S-10 with Sanitary Seal	84
SA-11	Sanitary Transmitter	85
F-20-3A	F-20 with Sanitary Seal	88

Parts List

Miscellaneous Parts List	91
--------------------------------	----

REFERENCES

Temperature Conversion Chart	93
Pressure Unit Cross Reference Chart	94

GENERAL PURPOSE

Electronic Pressure > General Purpose > S-20

Type S-20 General Purpose Pressure Transmitter

Standard features

- **Signal output:** 4-20 mA 2-wire
- **Supply voltage:** 8-35 VDC
- **Process connection:** NPT male (see below)
- **Electrical connection:** DIN with plug connector (see below)

S-20 Part Numbers

Gauge Ranges				
Description	4-20 mA 2-wire signal output			
	Standard DIN connector 1/2" NPT Male 0.25% Non-linearity		MiniDIN connector 1/4" NPT Male 0.5% Non-linearity	
Range	Part Number	List Price	Part Number	List Price
0-10 psi	52376460	\$440.75	52377563	\$312.63
0-15 psi	52375269	\$379.25	52376508	\$251.13
0-25 psi	52375277		52376524	
0-30 psi	52376486		52376541	
0-50 psi	52375285		52376559	
0-60 psi	52375293		52376567	
0-100 psi	52374301		52374319	
0-150 psi	52375307		52376575	
0-160 psi	52375315		52376583	
0-200 psi	52375323		52376591	
0-250 psi	52375331		52376605	
0-300 psi	52375340		52376613	
0-400 psi	52375358		52376630	
0-500 psi	52375366		52376648	
0-600 psi	52375382		52376656	
0-750 psi	52375374		52376664	
0-1,000 psi	52375391		52376672	
0-1,500 psi	52375404		52376699	
0-2,000 psi	52375412		52376753	
0-3,000 psi	52375421		52376770	
0-4,000 psi	52375439		52376796	
0-5,000 psi	52375455		52376800	
0-6,000 psi	52375447		52376818	
0-7,500 psi	52375463		52376826	
0-10,000 psi	52375471		52376834	
0-15,000 psi	52375480	\$440.75	52376842	\$312.63
0-20,000 psi	52375498		N/A	



Standard DIN connector
1/2" NPT Male
0.25% Non-linearity



MiniDIN connector
1/4" NPT Male
0.5% Non-linearity

Vacuum & Compound Ranges				
Description	4-20 mA 2-wire signal output			
	Standard DIN connector 1/2" NPT Male 0.25% Non-linearity		MiniDIN connector 1/4" NPT Male 0.5% Non-linearity	
Range	Part Number	List Price	Part Number	List Price
30"-0 HgVac	52375595	\$451.00	52377199	\$322.88
30"-0-30 psi	52375609		52377202	
30"-0-60 psi	52375617		52377211	
30"-0-100 psi	52375625		52377229	
30"-0-160 psi	52375633		52377237	
30"-0-200 psi	52375641		52377245	

Absolute Ranges				
Description	4-20 mA 2-wire signal output			
	Standard DIN connector 1/2" NPT Male 0.25% Non-linearity		MiniDIN connector 1/4" NPT Male 0.5% Non-linearity	
Range	Part Number	List Price	Part Number	List Price
0-15 psia	52375501	\$451.00	52376851	\$322.88
0-25 psia	52375528		52376877	
0-50 psia	52375552		52376885	
0-100 psia	52375579		52376907	
0-250 psia	52375561		52376915	
0-500 psia	52375587		52376923	

GENERAL PURPOSE

Electronic Pressure > General Purpose > S-20

S-20 Smart Codes for Custom Order Configurations				
Field no.	Code	Feature	Base Price	\$251.13
1			Additional Price	
	Non-linearity			
	6	0.5% B.F.S.L	N/C	
	3	0.25% B.F.S.L.	\$128.13	
	B	0.125% B.F.S.L	\$174.25	
	?	Other	On Inquiry	
2	Unit			
	P	psi	N/C	
	B	bar	N/C	
	?	Other - please specify	On Inquiry	
3	Pressure reference			
	G	Gauge	N/C	
	V	Vacuum or compound	\$71.75	
	A	Absolute	\$71.75	
	?	Other - please specify	On Inquiry	
4	Pressure range			
	269	0...10 psi (0...10 psi abs)	\$61.50	
	310	0...15 psi (0...15 psi abs) (-30 InHg...0 vacuum)	N/C	
	317	0...25 psi (0...25 psi abs)	N/C	
	321	0...30 psi (0...30 psi abs)	N/C	
	331	-30 InHg...+30 psi	N/C	
	335	0...50 psi (0...50 psi abs)	N/C	
	341	0...60 psi (0...60 psi abs) (-30 InHg...+45 psi)	N/C	
	351	-30 InHg...+60 psi	N/C	
	369	0...100 psi (0...100 psi abs)	N/C	
	379	-30 InHg...+100 psi	N/C	
	410	0...150 psi (0...150 psi abs)	N/C	
	411	0...160 psi	N/C	
	412	-30 InHg...+160 psi	N/C	
	414	0...200 psi (0...200 psi abs)	N/C	
	415	-30 InHg...+200 psi	N/C	
	417	0...250 psi (0...250 psi abs)	N/C	
	421	0...300 psi (0...300 psi abs)	N/C	
	422	-30 InHg...+300 psi	N/C	
	428	0...400 psi (0...400 psi abs)	N/C	
	434	0...500 psi (0...500 psi abs)	N/C	
	441	0...600 psi	N/C	
	452	0...750 psi	N/C	
	469	0...1,000 psi	N/C	
	510	0...1,500 psi	N/C	
	514	0...2,000 psi	N/C	
	521	0...3,000 psi	N/C	
	528	0...4,000 psi	N/C	
	534	0...5,000 psi	N/C	
	541	0...6,000 psi	N/C	
	552	0...7,500 psi	N/C	
	569	0...10,000 psi	N/C	
	610	0...15,000 psi	\$61.50	
	614	0...20,000 psi	\$61.50	
	???	Other	On Inquiry	

GENERAL PURPOSE

Electronic Pressure > General Purpose > S-20

ELECTRONIC PRESSURE

S-20 Smart Codes for Custom Order Configurations continued

Field no.	Code	Feature	Additional Price
5	Process connection		
	ND	1/2" NPT male	N/C
	NB	1/4" NPT male	N/C
	NP	1/4" NPT female	N/C
	NH	1/8" NPT male	N/C
	MV	7/16"-20 UNF SAE O-Ring Boss	N/C
	U2	7/16"-20 UNF SAE J514 74°	N/C
	UV	9/16"-18 UNF SAE O-Ring Boss	N/C
	??	Other - please specify	On Inquiry
6	Sealing washer		
	Z	None (always with NPT threads)	N/C
	?	Other - please specify	On Inquiry
7	Media temperature rating		
	3K	-30...+100°C	N/C
	4Q	-40...+125°C	\$51.25
	??	Other - please specify	On Inquiry
8	Signal output		
	A	4...20 mA, 2-wire (supply: 8-35 VDC)	N/C
	F	0 ... 10 V, 3-wire (supply: 12-35 VDC)	N/C
	G	0 ... 5 V, 3-wire (supply: 8-35 VDC)	N/C
	K	1 ... 5 V, 3-wire (supply: 8-35 VDC)	N/C
	L	1 ... 6 V, 3-wire (supply: 9-35 VDC)	N/C
	1	0.5 ... 4.5 V, 3-wire (supply: 8-35 VDC)	N/C
	W	0.5 ... 4.5 V, 3-wire ratiometric (supply: 5 VDC +/- 10%)	N/C
	D	20 ... 4 mA, 2-wire reverse output (supply: 8-35 VDC)	\$35.88
	O	10 ... 0 V, 3-wire reverse output (supply: 12-35 VDC)	\$35.88
	?	Other - please specify	On Inquiry
9	Electrical connection		
	AG	DIN 175301-803 A L connector	N/C
	CG	DIN 175301-803 C L connector	N/C
	M4	M12 x 1 (4-pin) circular connector	N/C
	C6	6-pin Bayonet connector (Mil plug)	\$66.63
	FI	Field case IP69k	\$102.50
	DL	Cable, IP67	\$46.13
	2X	1/2" NPT conduit with cable	\$66.63
	??	Other - please specify	On Inquiry

GENERAL PURPOSE

Electronic Pressure > General Purpose > S-20

S-20 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
Mating connector options (Match with previous 2 character connector codes)			
<i>with connector AG or CG</i>	G	Mating connector included	N/C
	C	1/2" NPT conduit connector included (only with AG)	N/C
	W	Connector with molded cable	\$20.50
	V	Connector with molded, shielded cable (only with AG)	\$35.88
<i>with connector M4 or MM</i>	Z	No connector provided	N/C
	S	Straight connector with molded cable	\$15.38
	T	Straight connector with shielded molded cable	\$25.63
	W	Angular connector with molded cable	\$15.38
<i>others</i>	Z	Without (always with C6, FI, DL, 2X)	N/C
10	?	Other - please specify	On Inquiry
Cable end finishing			
11	Z	Non-terminated	N/C
	U	Cable with free ends, tinned leads	N/C
	?	Other - please specify	On Inquiry
Cable length			
12	ZZ	None (always with cable end finishing Z)	N/C
	F6	6 feet	\$10.25
	FC	15 feet	\$25.63
	??	Other - please specify	On Inquiry
Certificates			
13	Z	Without	N/C
	?	Other - please specify	On Inquiry
Approvals			
14	Z	Without	N/C
	??	Other - please specify	On Inquiry
Additional order details			
15	Z	Without	N/C
	T	Additional text	On Inquiry

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15*

S-20 - - - - - - -

*Additional order details _____

GENERAL PURPOSE

Electronic Pressure > General Purpose > S-10

Type S-10 General Purpose Pressure Transmitter

Standard features

- **Signal output:** 4-20 mA 2-wire
- **Supply voltage:** 10-30 VDC
- **Process connection:** 1/2 NPT male
- **Electrical connection:** DIN EN 175301-803 (DIN 43 650) with plug connector



S-10 Part Numbers

Gauge Ranges		
Description		
Range	Part Number	List Price
0-50 inWC	8367656	\$417.07
0-100 inWC	8341481	
0-5 psi	8415072	
0-10 psi	8642885	
0-15 psi	8643628	
0-25 psi	8341995	
0-30 psi	8643636	
0-50 psi	8348868	
0-60 psi	8643644	
0-100 psi	8643652	
0-160 psi	8341155	
0-200 psi	8644918	
0-250 psi	8341163	
0-300 psi	8341732	
0-400 psi	8341953	
0-500 psi	8341740	
0-600 psi	8347128	
0-750 psi	4294930	
0-1,000 psi	8610007	
0-1,500 psi	8341219	
0-2,000 psi	8353098	
0-3,000 psi	8342275	
0-5,000 psi	8340638	
0-8,000 psi	8341864	
0-10,000 psi	8347242	
0-15,000 psi	8359143	

Vacuum & Compound Ranges		
Description		
Range	Part Number	List Price
30"-0 HgVac	8642850	\$508.98
30"-0-30 psi	8415080	
30"-0-60 psi	8415099	
30"-0-100 psi	8648646	
30"-0-160 psi	9796881	
30"-0-200 psi	8985538	

Absolute Pressure Ranges		
Description		
Range	Part Number	List Price
0-15 psia	8587582	\$508.98
0-25 psia	8358503	
0-50 psia	8347854	
0-100 psia	9734538	
0-250 psia	9734589	
0-500 psia	9767164	

NOTE: Standard items are shown in **bold print**.
(Subject to prior sale)

GENERAL PURPOSE

Electronic Pressure > General Purpose > S-10

S-10 Smart Codes for Custom Order Configurations			
Field no.	Code	Feature	
1			Base Price
			\$417.07
			Additional Price
	Signal output		
	A	4... 20 mA, 2-wire	N/C
	B	0... 20 mA, 3-wire	\$91.90
	F	0... 10 V, 3-wire (supply: 14-30 VDC)	\$91.90
	G	0... 5 V, 3-wire	\$91.90
2	W	0.5 ... 4.5 V 3-wire ratiometric (supply: 5 VDC +/- 10%)	\$91.90
	?	Other - please specify	On Inquiry
	Unit		
	P	psi	N/C
3	N	InWC	N/C
	3	psi absolute (from 15 psi to 250 psi absolute)	\$91.90
	?	Other - please specify	On Inquiry
	Pressure range		
3	CA	-30 inHg ... 0	\$91.90
	CD	-30 inHg ... 30 psi	\$91.90
	CF	-30 inHg ... 60 psi	\$91.90
	CH	-30 inHg ... 100 psi	\$91.90
	CK	-30 inHg ... 160 psi	\$91.90
	CL	-30 inHg ... 200 psi	\$91.90
	GG	0 InWC ... 50 InWC	N/C
	GU	0 InWC ... 100 InWC	N/C
	CN	0 psi ... 5 psi	N/C
	CP	0 psi ... 10 psi	N/C
	BC	0 psi ... 15 psi (0 psi ... 15 psi absolute)	N/C
	CQ	0 psi ... 25 psi (0 psi ... 25 psi absolute)	N/C
	BD	0 psi ... 30 psi	N/C
	DA	0 psi ... 50 psi (0 psi ... 50 psi absolute)	N/C
	BE	0 psi ... 60 psi	N/C
	BF	0 psi ... 100 psi (0 psi ... 100 psi absolute)	N/C
	BG	0 psi ... 160 psi	N/C
	BH	0 psi ... 200 psi	N/C
	DG	0 psi ... 250 psi (0 psi ... 250 psi absolute)	N/C
	BI	0 psi ... 300 psi	N/C
	BK	0 psi ... 400 psi	N/C
	DI	0 psi ... 500 psi	N/C
	BL	0 psi ... 600 psi	N/C
	DJ	0 psi ... 750 psi	N/C
	BN	0 psi ... 1,000 psi	N/C
	BO	0 psi ... 1,500 psi	N/C
	BP	0 psi ... 2,000 psi	N/C
	BQ	0 psi ... 3,000 psi	N/C
	BS	0 psi ... 5,000 psi	N/C
	DS	0 psi ... 8,000 psi	N/C
	BT	0 psi ... 10,000 psi	N/C
	BU	0 psi ... 15,000 psi	N/C
	??	Other - up to maximum specified pressure range	On Inquiry

GENERAL PURPOSE

Electronic Pressure > General Purpose > S-10

ELECTRONIC PRESSURE

S-10 Smart Codes for Custom Order Configurations continued

Field no.	Code	Feature	Additional Price
4	Process connection		
	NB	1/4" NPT	N/C
	ND	1/2" NPT	N/C
	NH	1/8" NPT	N/C
	GB	G 1/4 B	N/C
	GD	G 1/2 B	N/C
	NP	1/4" NPT female	\$67.88
	NQ	1/2" NPT female	\$67.88
	NR	1/8" NPT female	\$67.88
	UA	7/16-20 UNF SAE #4 J514 male	\$67.88
	UB	7/16-20 UNF SAE #4 J514 female	\$67.88
	UE	9/16-18 UNF SAE #6 J514 male	\$67.88
	UF	9/16-18 UNF SAE #6 J514 female	\$67.88
	UC	3/4-16 UNF SAE #8 J514 male	\$67.88
	UD	3/4-16 UNF SAE #8 J514 female	\$67.88
	CS	Diaphragm seal	On Inquiry
	??	Other - please specify	On Inquiry
5	Special design features		
	Z	Without	N/C
	A	Oxygen, oil and grease free ¹	\$106.06
	?	Other - please specify	On Inquiry
6	Accuracy		
	G	+/- 0.25% B.F.S.L.	N/C
	K	+/- 0.125% B.F.S.L. (> 100 inWC)	\$49.51
7	Electrical connection		
	A4	4 Pin L-plug DIN 175301-803 with (NEMA 5 / IP 65)	N/C
	AX	4 Pin L-plug DIN 175301-803 w / 1/2" NPT female conduit (NEMA 5/IP 65)	\$6.52
	M5	M12 x 1, 5 pin circular connector	\$35.35
	DL	Cable with free ends (NEMA 4 / IP 67)	\$67.88
	2X	1/2" NPT male conduit with cable (NEMA 4 / IP 67)	\$67.88
	XM	Submersible cable (NEMA 6 / IP 68)	\$176.76
	O4	4 Pin MIL plug PT02E-8-4P (NEMA 5 / IP 65)	\$91.90
	C6	6 Pin MIL plug PT02E-10-6P (NEMA 5 / IP 65)	\$91.90
8	??	Other - please specify	On Inquiry
	Cable length		
	Z	Without (always with plug connection)	N/C
	Y	5 feet	N/C
	1	10 feet	\$14.16
	2	20 feet	\$42.46
	3	30 feet	\$70.70
	4	40 feet	\$98.95
	5	50 feet	\$127.25
	?	Other - please specify	On Inquiry

GENERAL PURPOSE

Electronic Pressure > General Purpose > S-10

S-10 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
9	Temperature range of medium		
	A	-30 ... +100 °C (-22 ... +212 °F)	N/C
	B	-40 ... +125 °C (-40 ... +257 °F)	\$84.80
	X	Changed because of diaphragm seal attachment (only with process connection CS)	N/C
10	Approvals		
	Z	Without	N/C
	?	Other - please specify	On Inquiry
11	Quality certificates		
	Z	Without	N/C
	I	NIST Certificate of Calibration (always with 0.125% accuracy)	\$77.76
	?	Other - please specify	On Inquiry
12	Digital display		
	Z	Without	N/C
	1	Digital display (order separately)	On Inquiry
13	Additional order details		
	Z	Without	N/C
	T	Additional order details	On Inquiry

NOTE:

¹ Maximum media temperature is -4 ... +140° F (-20 ... +60° C) for pressure ranges 100 InWC to 300 psi. (Field 5, Code A)

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10 11 12 13*

S-10 - - - - -

*Additional order details

GENERAL PURPOSE

Electronic Pressure > General Purpose > S-11

Type S-11 Flush Diaphragm Pressure Transmitter

Standard features

- **Signal output:** 4-20 mA 2-wire
- **Supply voltage:** 10-30 VDC
- **Electrical connection:** DIN EN 175301-803 (DIN 43 650) with plug connector
- **Process connection:** G1B or G1/2B depending upon pressure range



S-11 Part Numbers

Gauge Ranges		
Description		
Range	Part Number	List Price
0-50 inWC ¹	9739640	\$487.78
0-100 inWC ¹	8341473	
0-5 psi ¹	4204051	
0-10 psi ¹	8341074	
0-15 psi ¹	8345726	
0-25 psi ¹	8395736	
0-30 psi ¹	7113644	
0-50 psi	8395766	
0-60 psi	8351312	
0-100 psi	8341724	
0-160 psi	8643407	
0-200 psi	8641064	
0-250 psi	8341961	
0-300 psi	8341171	
0-400 psi	8342003	
0-500 psi	8341197	
0-600 psi	8345745	
0-750 psi	8352865	
0-1,000 psi	9777517	
0-1,500 psi	8366706	
0-2,000 psi	8640823	
0-3,000 psi	8341758	
0-5,000 psi	8340646	
0-8,000 psi	9749581	

Vacuum & Compound Ranges		
Description		
Range	Part Number	List Price
30"-0 HgVac ¹	8395706	\$579.63
30"-0-30 psi	9796058	
30"-0-60 psi	8345622	
30"-0-100 psi	8340242	
30"-0-200 psi	8342118	

NOTES:

¹ Pressure ranges from 50 inWC to 25 PSI are supplied with G1B flush process connections; see datasheet for details

Standard items shown in **bold print**. (Subject to prior sale)

GENERAL PURPOSE

Electronic Pressure > General Purpose > S-11

S-11 Smart Codes for Custom Order Configurations			
Field no.	Code	Feature	
1			Base Price
			Additional Price
			\$487.78
	Signal output		
	A	4... 20 mA, 2-wire	N/C
	B	0... 20 mA, 3-wire	\$91.90
	F	0... 10 V, 3-wire (supply: 14-30 VDC)	\$91.90
	G	0... 5 V, 3-wire	\$91.90
2	W	0.5 ... 4.5 V 3-wire ratiometric (supply: 5 VDC +/- 10%)	\$91.90
	?	Other - please specify	On Inquiry
	Unit		
	P	psi	N/C
3	N	InWC	N/C
	3	psi absolute (from 15 psi to 250 psi absolute)	\$91.90
	?	Other - please specify	On Inquiry
	Pressure range		
3	CA	-30 inHg ... 0	\$91.90
	CD	-30 inHg ... 30 psi	\$91.90
	CF	-30 inHg ... 60 psi	\$91.90
	CH	-30 inHg ... 100 psi	\$91.90
	CK	-30 inHg ... 160 psi	\$91.90
	CL	-30 inHg ... 200 psi	\$91.90
	GG	0 InWC ... 50 InWC	N/C
	GU	0 InWC ... 100 InWC	N/C
	CN	0 psi ... 5 psi	N/C
	CP	0 psi ... 10 psi	N/C
	BC	0 psi ... 15 psi (0 psi ... 15 psi absolute)	N/C
	CQ	0 psi ... 25 psi (0 psi ... 25 psi absolute)	N/C
	BD	0 psi ... 30 psi	N/C
	DA	0 psi ... 50 psi (0 psi ... 50 psi absolute)	N/C
	BE	0 psi ... 60 psi	N/C
	BF	0 psi ... 100 psi (0 psi ... 100 psi absolute)	N/C
	BG	0 psi ... 160 psi	N/C
	BH	0 psi ... 200 psi	N/C
	DG	0 psi ... 250 psi (0 psi ... 250 psi absolute)	N/C
	BI	0 psi ... 300 psi	N/C
	BK	0 psi ... 400 psi	N/C
	DI	0 psi ... 500 psi	N/C
	BL	0 psi ... 600 psi	N/C
	DJ	0 psi ... 750 psi	N/C
	BN	0 psi ... 1,000 psi	N/C
	BO	0 psi ... 1,500 psi	N/C
	BP	0 psi ... 2,000 psi	N/C
	BQ	0 psi ... 3,000 psi	N/C
	BS	0 psi ... 5,000 psi	N/C
	DS	0 psi ... 8,000 psi	N/C
	??	Other - please specify	On Inquiry

GENERAL PURPOSE

Electronic Pressure > General Purpose > S-11

ELECTRONIC PRESSURE

S-11 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
4	Process connection		
	85	G 1 B, flush diaphragm with O-ring (up to 25 psi)	N/C
	86	G 1/2 B, flush diaphragm with O-ring (≥ 30 psi)	N/C
	??	Other - please specify	On Inquiry
5	Material of wetted parts		
	1	Stainless steel, NBR O-Ring ¹	N/C
	L	Stainless steel, Viton® O-Ring	\$15.59
	?	Other - please specify	On Inquiry
6	Special design features		
	Z	Without	N/C
	G	Suitable for food	\$63.65
	?	Other - please specify	On Inquiry
7	Accuracy		
	G	+/- 0.25% B.F.S.L.	N/C
	K	+/- 0.125% B.F.S.L. (> 100 inWC)	\$49.51
8	Electrical connection		
	A4	4 Pin L-plug DIN 175301-803 with (NEMA 5 / IP 65)	N/C
	AX	4 Pin L-plug DIN 175301-803 with 1/2" NPT female conduit (NEMA 5 / IP 65)	\$6.52
	DL	Cable with free ends (NEMA 4 / IP 67)	\$67.88
	2X	1/2" male conduit with cable (NEMA 4 / IP 67)	\$67.88
	XM	Submersible cable (NEMA 6 / IP 68)	\$176.76
	O4	4 Pin MIL Plug PT02E-8-4P (NEMA 5 / IP 65)	\$91.90
	O6	6 Pin MIL Plug PT02E-10-6P (NEMA 5 / IP 65)	\$91.90
9	??	Other - please specify	On Inquiry
	Cable length		
	Z	Without (always with plug connection)	N/C
	Y	5 feet	N/C
	1	10 feet	\$14.16
	2	20 feet	\$42.46
	3	30 feet	\$70.70
	4	40 feet	\$98.95
	5	50 feet	\$127.25
	?	Other - please specify	On Inquiry

GENERAL PURPOSE

Electronic Pressure > General Purpose > S-11

S-11 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
	Temperature range of medium		
	A	-30 ... +100 °C (-22 ... +212 °F)	N/C
	C	-20 ... +150 °C (-4 ... +302 °F) with cooling element	On Inquiry
11	Approvals		
	Z	Without	N/C
	?	Other - please specify	On Inquiry
12	Quality certificates		
	Z	Without	N/C
	I	NIST Certificate of Calibration (always with 0.125% accuracy)	\$77.76
	?	Other - please specify	On Inquiry
13	Digital display		
	Z	Without	N/C
	1	Digital Display (order separately)	On Inquiry
14	Additional order details		
	Z	Without	N/C
	T	Additional order details	N/C

TOTAL PRICE

NOTES:

¹ Not available with cooling element option (Field 10, Code C)

² Maximum media temperature is -4 ... +140°F (-20 ... +60°C) for pressure ranges 100 InWC to 500 psi. (Field 6, Code A)

Order Code: 1 2 3 4 5 6 7 8 9 10 11 12 13 14*

S-11 - - - - -

*Additional order details _____

GENERAL PURPOSE

Electronic Pressure > General Purpose > F-20

Type F-20 Pressure Transmitter with NEMA 4X Integral Junction Box

Standard features

- **Signal output:** 4-20 mA 2-wire
- **Supply voltage:** 11-30 VDC
- **Process connection:** 1/2 NPT male
- **Electrical connection:** Field case with 1/2" NPT female conduit

F-20 Part Numbers



Gauge Ranges		
Description		
Range	Part Number	List Price
0-50 inWC	12127469	\$586.68
0-100 inWC	12127477	
0-5 psi	12127493	
0-10 psi	12127507	
0-15 psi	12127523	
0-25 psi	12127531	
0-30 psi	12127540	
0-50 psi	12127558	
0-60 psi	12127566	
0-100 psi	12128873	
0-160 psi	12127574	
0-200 psi	12127582	
0-300 psi	12127591	
0-500 psi	12127639	
0-1,000 psi	12127671	
0-2,000 psi	12127681	
0-3,000 psi	12127699	
0-5,000 psi	12127701	

Vacuum & Compound Ranges		
Description		
Range	Part Number	List Price
30 inHg vac	12127400	\$678.64
30 inHg/30 psi	12127418	
30 inHg/60 psi	12127426	
30 inHg/100 psi	12127434	
30 inHg/200 psi	12127451	

NOTE: Standard items shown in **bold print**. (Subject to prior sale)

GENERAL PURPOSE

Electronic Pressure > General Purpose > F-20

F-20 Smart Codes for Custom Order Configurations			
Field no.	Code	Feature	
1			Base Price
			Additional Price
			\$586.68
	Signal output		
	A	4 ... 20 mA, 2-wire	N/C
	B	0 ... 20 mA, 3-wire	\$91.90
	F	0 ... 10 V, 3-wire (supply: 14-30 VDC)	\$91.90
2	G	0 ... 5 V, 3-wire	\$91.90
	?	Other - please specify	On Inquiry
	Unit		
	P	PSI	N/C
	N	InWC	N/C
3	3	psi absolute	\$89.66
	?	Other - please specify	On Inquiry
	Pressure range		
	CA	-30 inHg ... 0	\$91.90
	CD	-30 inHg ... 30 psi	\$91.90
	CF	-30 inHg ... 60 psi	\$91.90
	CH	-30 inHg ... 100 psi	\$91.90
	CK	-30 inHg ... 160 psi	\$91.90
	CL	-30 inHg ... 200 psi	\$91.90
	GG	0 InWC ... 50 InWC	N/C
	GU	0 InWC ... 100 InWC	N/C
	CN	0 psi ... 5 psi	N/C
	CP	0 psi ... 10 psi	N/C
	BC	0 psi ... 15 psi (0 psi ... 15 psi absolute)	N/C
	CQ	0 psi ... 25 psi (0 psi ... 25 psi absolute)	N/C
	BD	0 psi ... 30 psi	N/C
	DA	0 psi ... 50 psi (0 psi ... 50 psi absolute)	N/C
	BE	0 psi ... 60 psi	N/C
	BF	0 psi ... 100 psi (0 psi ... 100 psi absolute)	N/C
	BG	0 psi ... 160 psi	N/C
	BH	0 psi ... 200 psi	N/C
	DG	0 psi ... 250 psi (0 psi ... 250 psi absolute)	N/C
	BI	0 psi ... 300 psi	N/C
	BK	0 psi ... 400 psi	N/C
	DI	0 psi ... 500 psi	N/C
	BL	0 psi ... 600 psi	N/C
	DJ	0 psi ... 750 psi	N/C
	BN	0 psi ... 1,000 psi	N/C
	BO	0 psi ... 1,500 psi	N/C
	BP	0 psi ... 2,000 psi	N/C
	BQ	0 psi ... 3,000 psi	N/C
	BS	0 psi ... 5,000 psi	N/C
	DS	0 psi ... 8,000 psi	N/C

GENERAL PURPOSE

Electronic Pressure > General Purpose > F-20

ELECTRONIC PRESSURE

F-20 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
3	Pressure Range continued		
	BT	0 psi ... 10,000 psi	N/C
	BU	0 psi ... 15,000 psi	N/C
	??	Other - please specify	On Inquiry
4	Process connection		
	ND	1/2" NPT	N/C
	NB	1/4" NPT	N/C
	GD	G 1/2 B	N/C
	GB	G 1/4 B	N/C
	CS	Diaphragm seal	On Inquiry
	??	Other - please specify	On Inquiry
5	Special design features		
	Z	Without	N/C
	G	Suitable for food	\$63.65
	A	Oxygen, oil and grease free ¹	On Inquiry
	??	Other - please specify	On Inquiry
6	Accuracy		
	G	+/- 0.25% B.F.S.L.	N/C
	K	+/- 0.125% B.F.S.L.	\$49.51
7	Electrical connection		
	FE	1/2" NPT female conduit (IP67)	N/C
	FH	Nickel plated brass cable gland (IP68)	N/C
	FC	Stainless steel cable gland (IP68)	\$42.46
	??	Other - please specify	On Inquiry
8	Temperature range of medium		
	A	-30 ... +100 °C (-22 ... +212 °F)	N/C
	B	-40 ... +125 °C (-40 ... +257 °F)	\$84.80
	X	Changed because of diaphragm seal attachment	On Inquiry
9	Quality certificates		
	Z	Without	N/C
	I	NIST Certificate of Calibration (always with 0.125% accuracy)	\$77.76
10	Digital display		
	Z	Without	N/C
	1	Digital display (order separately)	On Inquiry
11	Additional order details		
	Z	Without	N/C
	T	Additional order details	On Inquiry

NOTE:

¹ Maximum media temperature is -4 ... +140° F (-20 ... +60° C) for pressure ranges 100 InWC to 300 psi.

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10 11*

F-20 - - - - -

*Additional order details _____

Type F-21 Flush Diaphragm Pressure Transmitter with NEMA 4X Integral Junction Box

Standard features

- **Signal output:** 4-20 mA 2-wire
- **Supply voltage:** 11-30 VDC
- **Process connection:** G1/2B or G1B flush diaphragm depending upon pressure range
- **Electrical connection:** Field case with 1/2" NPT female conduit

F-21 Part Numbers

Gauge Ranges		
Description		
Range	Part Number	List Price
0-50 inWC ¹	12126331	\$657.44
0-5 psi ¹	12127728	
0-10 psi ¹	12127736	
0-100 psi	12127744	

NOTE:

¹ Pressure ranges from 50 inWC to 25 psi are supplied with G1B flush process connections; see datasheet for details.

Standard items shown in **bold print**. (Subject to prior sale)



GENERAL PURPOSE

Electronic Pressure > General Purpose > F-21

F-21 Smart Codes for Custom Order Configurations			
Field no.	Code	Feature	
1			Base Price
			\$657.44
			Additional Price
	Signal output		
	A	4 ... 20 mA, 2-wire	N/C
	B	0 ... 20 mA, 3-wire	\$91.90
	F	0 ... 10 V, 3-wire (supply: 14-30 VDC)	\$91.90
2	G	0 ... 5 V, 3-wire	\$91.90
	?	Other - please specify	On Inquiry
	Unit		
	P	psi	N/C
	N	InWC	N/C
3	3	psi absolute	\$89.66
	?	Other - please specify	On Inquiry
	Pressure range		
	CA	-30 inHg ... 0	\$91.90
	CD	-30 inHg ... 30 psi	\$91.90
	CF	-30 inHg ... 60 psi	\$91.90
	CH	-30 inHg ... 100 psi	\$91.90
	CK	-30 inHg ... 160 psi	\$91.90
	CL	-30 inHg ... 200 psi	\$91.90
	GG	0 InWC ... 50 InWC	N/C
	GU	0 InWC ... 100 InWC	N/C
	CN	0 psi ... 5 psi	N/C
	CP	0 psi ... 10 psi	N/C
	BC	0 psi ... 15 psi (0 psi ... 15 psi absolute)	N/C
	CQ	0 psi ... 25 psi (0 psi ... 25 psi absolute)	N/C
	BD	0 psi ... 30 psi	N/C
	DA	0 psi ... 50 psi (0 psi ... 50 psi absolute)	N/C
	BE	0 psi ... 60 psi	N/C
	BF	0 psi ... 100 psi (0 psi ... 100 psi absolute)	N/C
	BG	0 psi ... 160 psi	N/C
	BH	0 psi ... 200 psi	N/C
	DG	0 psi ... 250 psi (0 psi ... 250 psi absolute)	N/C
	BI	0 psi ... 300 psi	N/C
	BK	0 psi ... 400 psi	N/C
	BL	0 psi ... 600 psi	N/C
	DJ	0 psi ... 750 psi	N/C
	BN	0 psi ... 1,000 psi	N/C
	BO	0 psi ... 1,500 psi	N/C
	BP	0 psi ... 2,000 psi	N/C
	BQ	0 psi ... 3,000 psi	N/C
	BS	0 psi ... 5,000 psi	N/C
	DS	0 psi ... 8,000 psi	N/C
	??	Other - please specify	On Inquiry

GENERAL PURPOSE

Electronic Pressure > General Purpose > F-21

F-21 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
4	Process connection		
	85	G 1 B, flush diaphragm with O-ring (up to 25 psi)	N/C
	86	G 1/2 B, flush diaphragm with O-ring (≥ 30 psi)	N/C
	??	Other - please specify	On Inquiry
5	Material of wetted parts		
	1	Stainless steel, NBR O-Ring ¹	N/C
	L	Stainless steel, Viton® O-Ring	\$15.59
	?	Other - please specify	On Inquiry
6	Special design features		
	Z	Without	N/C
	G	Suitable for food	\$63.65
	A	Oxygen, oil and grease free	On Inquiry
	?	Other - please specify	On Inquiry
7	Accuracy		
	G	+/- 0.25% B.F.S.L.	N/C
	K	+/- 0.125% B.F.S.L.	\$49.51
8	Electrical connection		
	FE	1/2" NPT female conduit (IP67)	N/C
	FH	Nickel plated brass cable gland (IP68)	N/C
	FC	Stainless steel cable gland (IP68)	\$42.46
	??	Other - please specify	N/C
9	Temperature range of medium		
	A	-30 ... +100° C (-22 ... +212° F)	N/C
	B	-40 ... +125° C (-40 ... +257° F)	\$78.34
	C	-20 ... +150° C (-4 ... +302° F) with cooling element	On Inquiry
	X	Changed because of diaphragm seal attachment	On Inquiry
10	Quality certificates		
	Z	Without	N/C
	I	NIST Certificate of Calibration (always with 0.125% accuracy)	\$77.76
11	Digital display		
	Z	Without	N/C
	1	Digital display (order separately)	On Inquiry
12	Additional order details		
	Z	Without	N/C
	T	Additional order details	On Inquiry

NOTES:

¹ Not available with cooling element option (Field 9, Code C)

² Maximum media temperature is -4 ... +140° F (-20 ... +60° C) for pressure ranges 100 InWC to 500 psi.

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10 11 12*

F-21 - - - - -

*Additional order details

GENERAL PURPOSE

Electronic Pressure > General Purpose > C-10

Type C-10 General Purpose Pressure Transmitter

Standard features

- Signal output: 4-20 mA 2-wire
- Supply voltage: 10-30 VDC
- Process connection: 1/4 NPT Male
- Electrical connection: DIN 175301-803 with mini L-plug connector



C-10 Part Numbers

Gauge Ranges		
Description		
Range	Part Number	List Price
0-100 inWC	4204883	\$275.71
0-5 psi	8363434	
0-10 psi	4302940	
0-15 psi	8363442	
0-25 psi	8363450	
0-30 psi	4256671	
0-50 psi	8363468	
0-60 psi	8363476	
0-100 psi	8363515	
0-150 psi	8363485	
0-200 psi	8363493	
0-250 psi	4256698	
0-300 psi	8363506	
0-400 psi	4323697	
0-500 psi	9697688	
0-600 psi	8357247	
0-1,000 psi	8357255	
0-1,500 psi	8357264	
0-2,000 psi	8357272	
0-3,000 psi	8354753	
0-5,000 psi	8347390	
0-7,500 psi	8357280	
0-10,000 psi	8357298	
0-15,000 psi	8359576	

Absolute Pressure Ranges		
Description		
Range	Part Number	List Price
0-15 psia	4228146	\$346.37
0-25 psia	4258615	
0-50 psia	4346127	

NOTE: Standard items shown and are shown in **bold print**. (Subject to prior sale)

GENERAL PURPOSE

Electronic Pressure > General Purpose > C-10

C-10 Smart Codes for Custom Order Configurations			
Field no.	Code	Feature	
1			Base Price
			Additional Price
	Signal output		
	A	4... 20 mA, 2-wire	N/C
	G	0... 5 V, 3-wire	\$70.70
	F	0... 10 V, 3-wire (supply: 14-30 VDC)	\$70.70
	W	0.5... 4.5V ratiometric	\$70.70
2	?	Other - please specify	On Inquiry
	Unit		
	P	psi	N/C
	N	InWC	N/C
	3	psi absolute (from 15 psi to 250 psi absolute)	\$70.70
3	?	Other - please specify	On Inquiry
	Pressure range		
	GU	0 InWC ... 100 InWC	N/C
	CN	0 psi ... 5 psi	N/C
	CP	0 psi ... 10 psi	N/C
	BC	0 psi ... 15 psi (0 psi ... 15 psi absolute)	N/C
	CQ	0 psi ... 25 psi (0 psi ... 25 psi absolute)	N/C
	BD	0 psi ... 30 psi	N/C
	DA	0 psi ... 50 psi (0 psi ... 50 psi absolute)	N/C
	BE	0 psi ... 60 psi	N/C
	BF	0 psi ... 100 psi (0 psi ... 100 psi absolute)	N/C
	DC	0 psi ... 150 psi	N/C
	BH	0 psi ... 200 psi	N/C
	DG	0 psi ... 250 psi (0 psi ... 250 psi absolute)	N/C
	BI	0 psi ... 300 psi	N/C
	BK	0 psi ... 400 psi	N/C
	DI	0 psi ... 500 psi	N/C
	BL	0 psi ... 600 psi	N/C
	DJ	0 psi ... 750 psi	N/C
	BN	0 psi ... 1,000 psi	N/C
	BO	0 psi ... 1,500 psi	N/C
	BP	0 psi ... 2,000 psi	N/C
	BQ	0 psi ... 3,000 psi	N/C
	BS	0 psi ... 5,000 psi	N/C
	DS	0 psi ... 8,000 psi	N/C
	BT	0 psi ... 10,000 psi	N/C
	BU	0 psi ... 15,000 psi	N/C
	??	Other - up to maximum specified pressure range	On Inquiry

ELECTRONIC PRESSURE

GENERAL PURPOSE

Electronic Pressure > General Purpose > C-10

ELECTRONIC PRESSURE

C-10 Smart Codes for Custom Order Configurations continued

Field no.	Code	Feature	Additional Price
4	Process connection		
	NB	1/4" NPT	N/C
	ND	1/2" NPT	N/C
	NH	1/8" NPT	N/C
	GB	G 1/4 B	N/C
	GD	G 1/2 B	N/C
	NP	1/4" NPT female	\$67.88
	NQ	1/2" NPT female	\$67.88
	NR	1/8" NPT female	\$67.88
	UA	7/16-20 UNF SAE #4 J514 male	\$67.88
	UB	7/16-20 UNF SAE #4 J514 female	\$67.88
	UE	9/16-18 UNF SAE #6 J514 male	\$67.88
	UF	9/16-18 UNF SAE #6 J514 female	\$67.88
	UC	3/4-16 UNF SAE #8 J514 male	\$67.88
	UD	3/4-16 UNF SAE #8 J514 female	\$67.88
	??	Other - please specify	On Inquiry
5	Special design features		
	Z	Without	N/C
	A	Oxygen, oil and grease free ¹	\$91.90
	?	Other - please specify	On Inquiry
6	Electrical connection		
	II	DIN 175301-80 with miniature L plug connector	N/C
	H2	4 Pin miniature L-Plug DIN 175301-803 w/molded cable (NEMA 5 / IP 65)	\$37.55
	DL	Cable with free ends (NEMA 4 / IP67)	\$39.58
	CR	Cable with free ends (NEMA 5 / IP65)	\$39.58
	M5	5 Pin locking plug M12 x 1 (NEMA 5 / IP 65)	\$21.20
	??	Other - please specify	On Inquiry
7	Cable length		
	Z	Without	N/C
	Y	5 feet (only with H2, DL or CR)	N/C
	1	10 feet (only with DL or CR)	\$14.16
	2	20 feet (only with DL or CR)	\$42.46
	3	30 feet (only with DL or CR)	\$70.70
	4	40 feet (only with DL or CR)	\$98.95
	5	50 feet (only with DL or CR)	\$127.25
	?	Other - please specify	On Inquiry

GENERAL PURPOSE

Electronic Pressure > General Purpose > C-10

C-10 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
8	Quality certificates		
	Z	Without	N/C
	I	NIST Certificate of Calibration	\$77.76
9	Digital display		
	Z	Without	N/C
10	Additional order details		
	Z	Without	N/C
	T	Additional order details	On Inquiry

NOTE:

¹ Maximum media temperature is -4 ... +140°F (-20 ... +60°C) for pressure ranges 100 InWC to 300 psi. (Field 5, Code A)

TOTAL PRICE

ELECTRONIC PRESSURE

Order Code: 1 2 3 4 5 6 7 8 9 10 *

C-10 - - - - **A** -

*Additional order details _____

Type A-10 General Purpose Pressure Transmitter

Standard features

- Signal output: 4-20 mA 2-wire or 0-10 V 3-wire
- Supply voltage: 8-30 DC (14-30 VDC)
- Process connection: 1/4 NPT male
- Electrical connection: DIN EN 175301-803 (DIN 43 650) with plug connector
- Non-linearity: ≤ +/- 0.5% B.F.S.L.

A-10 Part Numbers

Description			
Range	Part Number		List Price
	4-20 mA 2-wire	0-10 V 3-wire	
0 ... 15 psia	50426354	50426737	\$194.28
0 ... 100 psia	50426389	50426761	
0 ... 15 psi	50426397	50426770	\$156.73
0 ... 25 psi	50426401	50426788	
0 ... 50 psi	50426427	50426800	
0 ... 100 psi	50372475	50426818	
0 ... 200 psi	50398083	50426834	
0 ... 300 psi	50426460	50426842	
0 ... 500 psi	50426478	50426851	
0 ... 1,000 psi	50426486	50426869	
0 ... 1,500 psi	50426494	50426877	
0 ... 2,000 psi	50426508	50426885	
0 ... 3,000 psi	50426516	50426893	
0 ... 5,000 psi	50372483	50426907	
0 ... 10,000 psi	50426532	50426915	



NOTE: Standard items shown in **bold print**. (Subject to prior sale)

GENERAL PURPOSE

Electronic Pressure > General Purpose > A-10

A-10 Smart Codes for Custom Order Configurations				
Field no.	Code	Feature		
1				Base Price
				Additional Price
				\$156.73
1	Non-linearity			
	6	< + 0.5% B.F.S.L.		N/C
	3	< + 0.25% B.F.S.L.		\$125.34
2	Unit			
	P	psi		N/C
	?	Other		On Inquiry
3	Absolute or relative pressure			
	G	Gauge		N/C
	A	Absolute		\$37.60
	V	Compound		\$37.60
4	Pressure range			
	310	0 ... 15 psig	0 ... 15 psia -30 inHg vacuum	N/C
	317	0 ... 25 psig	0 ... 25 psia	N/C
	321	0 ... 30 psig	0 ... 30 psia	N/C
	331	-30 inHg ... 30 psi		N/C
	335	0 ... 50 psig	0 ... 50 psia	N/C
	351	-30 inHg ... 60 psi		N/C
	369	0 ... 100 psig	0 ... 100 psia	N/C
	379	-30 inHg ... 100 psi		N/C
	411	0 ... 160 psig		N/C
	412	-30 inHg ... 160 psi		N/C
	414	0 ... 200 psig	0 ... 200 psia	N/C
	415	-30 inHg ... 200 psi		N/C
	421	0 ... 300 psig	0 ... 300 psia	N/C
	422	-30 inHg ... 300 psi		N/C
	434	0 ... 500 psig		N/C
	469	0 ... 1,000 psig		N/C
	510	0 ... 1,500 psig		N/C
	514	0 ... 2,000 psig		N/C
	521	0 ... 3,000 psig		N/C
	534	0 ... 5,000 psig		N/C
	569	0 ... 10,000 psig		N/C
	???	Other		On Inquiry
5	Process connection			
	NB	1/4 NPT	T2	N/C
	NP	1/4 NPT female	T2	N/C
	ND	1/2 NPT	T2	N/C
	MV	7/16"-20 UNF SAE O-ring Boss	T1	N/C
	MI	M20 x 1.5	T3	N/C
	GB	G 1/4 B	T3	N/C
	GD	G 1/2 B	T3	N/C
	??	other		On Inquiry

GENERAL PURPOSE

Electronic Pressure > General Purpose > A-10

A-10 Smart Codes for Custom Order Configurations continued

Field no.	Code	Feature	Additional Price			
6		Sealing	Thread type - see process connection	T1	T2	T3
	L	FPM/FKM		N/C	-	-
	C	Copper		-	-	N/C
	S	Stainless steel		-	-	\$13.78
	Z	Without			N/C	
7		Temperature range of medium				
	Z	0...+80 °C (-32°F ... 176 °F)		N/C		
	A	-30...+100 °C (-22°F ... 212 °F)		\$31.02		
8		Signal output				
	A	4 ... 20 mA, 2-wire		N/C		
	F	0 ... 10 V, 3-wire		N/C		
	G	0 ... 5 V, 3-wire		N/C		
	K	1 ... 5 V, 3-wire		N/C		
	W	0.5 ... 4.5 V, 3-wire ratiometric		N/C		
	?	Other		On Inquiry		
9		Power supply				
	A	8...30 V DC (only with signal outputs A, G, or K)		N/C		
	C	14...30 V DC (only with signal output F)		N/C		
	E	5 V DC +/- 10% (only with signal output W)		N/C		
	?	Other		On Inquiry		
10		Electrical connection				
	AG	Valve connector, size A (DIN)		N/C		
	AK	Valve connector, size A with cable		\$43.84		
	CG	Valve connector, size C (Mini DIN)		N/C		
	CK	Valve connector, size C with cable		On Inquiry		
	M4	Circular connector M12x1, 4 pin		N/C		
	MG	Angled connector M12x1, 4 pin with cable		\$31.34		
	MI	Straight connector M12x1, 4 pin with cable		\$31.26		
	DL	Cable with free ends (IP 67)		\$43.90		
11		Cable length				
	Z	Without		N/C		
	6	6 feet (only with: AK,CK, MG, MI, or DL)		N/C		
	7	15 feet (only with: AK,CK, MG, MI, or DL)		\$20.03		
	?	Other		On Inquiry		
12		Certificates				
	Z	Without		N/C		
13		Approvals				
	S	UL / CSA / GOST		N/C		
	?	Other		On Inquiry		

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10 11 12 13*

A-10 - - - - - -

*Additional order details _____

Type OT-1 General Purpose Pressure Transmitter 100 psi to 8,000 psi



Note: 50 piece minimum order quantity applies.

OT-1 Smart Codes for Custom Order Configurations			
Field no.	Code	Feature	
1			Base Price
			\$120.59
			Additional Price
	Signal output		
	A	4 ... 20 mA, 2-wire (supply: 8-36 VDC)	N/C
	K	1 ... 5 V, 3-wire	N/C
	F	0 ... 10, 3-wire (supply: 14-36 VDC)	N/C
2	W	0.5 - 4.5V 3-wire ratiometric (supply: 5 VDC +/- 10%)	N/C
	?	Other - please specify	On Inquiry
3	Unit		
	P	psi	N/C
	?	Other - please specify	On Inquiry
3	Pressure range		
	CH	30 inHg ... 100 psi	N/C
	CL	30 inHg ... 200 psi	N/C
	BF	0 psi ... 100 psi	N/C
	DC	0 psi ... 150 psi	N/C
	DG	0 psi ... 250 psi	N/C
	BI	0 psi ... 300 psi	N/C
	DI	0 psi ... 500 psi	N/C
	BN	0 psi ... 1,000 psi	N/C
	BO	0 psi ... 1,500 psi	N/C
	BP	0 psi ... 2,000 psi	N/C
	BQ	0 psi ... 3,000 psi	N/C
	BS	0 psi ... 5,000 psi	N/C
	DS	0 psi ... 8,000 psi	N/C
	??	Other - please specify	On Inquiry

GENERAL PURPOSE

Electronic Pressure > General Purpose > OT-1

ELECTRONIC PRESSURE

OT-1 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
4	Process connection		
	NB	1/4" NPT	N/C
	MV	7/16-20 UNF SAE #4 J514 male w/ O-ring boss	N/C
	GB	G 1/4 B	N/C
	HD	G 1/4 A DIN 3852-E	N/C
	HN	M 14x1.5 DIN 3852-E	N/C
	??	Other - please specify	On Inquiry
5	Electrical connection		
	M4	4 Pin locking plug M12 x 1 (NEMA 4 / IP 67)	N/C
	R3	Connector Metri pack series 150, 3-pin	N/C
	DL	Cable with free ends (NEMA 4 / IP 67)	\$19.81
	G3	Deutsch 3 pin DT04-3P	N/C
	S3	AMP superseal 1.5 3-pin (NEMA 4 / IP 67)	N/C
	??	Other - please specify	On Inquiry
6	Cable length		
	Z	Without (always with plug version)	N/C
	A	0.5 meter (1.6 feet)	N/C
	B	2 meter (6.5 feet)	\$7.05
	G	5 meter (16.4 feet)	\$21.20
	?	Other	On Inquiry
7	Quality certificates		
	Z	Without	N/C
	1	Other - please specify	On Inquiry
8	Digital display		
	Z	Without	N/C
	1	Digital display (order separately)	On Inquiry
9	Additional order details		
	Z	Without	N/C
	T	Additional order details	On Inquiry

TOTAL PRICE

Note: 50 piece minimum order quantity applies.

Order Code: 1 2 3 4 5 6 7 8 9*

OT - 1 - - - - -

*Additional order details

GENERAL PURPOSE

Electronic Pressure > General Purpose > DG-10

Type DG-10 Digital Pressure Gauge

Standard features

- **Case:** 3.15" diameter stainless steel
- **Process connection:** 1/4" NPT male
- **Power requirements:** 2 AA batteries
- **Stocked enhanced version includes protective rubber boot**

DG-10 Part Numbers

Description				
Range	DG-10-S Standard Part #	List Price	DG-10-E Standard Part #	List Price
-30 inHg...29 psi	50365444	\$377.56	50365657	\$469.36
-30 inHg...72 psi	50365452		50365673	
-30 inHg...145 psi	50365461		50365690	
0 psi ... 30 psi	50365479	\$346.05	50365720	\$437.90
0 psi ...60 psi	50365487		50365771	
0 psi ...145 psi	50365495		50365789	
0 psi ...300 psi	50365509		50365797	
0 psi ...600 psi	50365517		50365819	
0 psi ...1,450 psi	50365525	\$377.56	50365827	\$469.36
0 psi ...2,000 psi	50365584		50365835	
0 psi ...3,000 psi	50365592		50365843	
0 psi ...5,000 psi	50365614		50365851	
0 psi ...7,500 psi	50365622		50365860	
0 psi ...10,000 psi	50365631		50365878	



Type DG-10-S



Type DG-10-E

ELECTRONIC PRESSURE

GENERAL PURPOSE

Electronic Pressure > General Purpose > DG-10

ELECTRONIC PRESSURE

DG-10 Smart Codes for Custom Order Configurations				
Field no.	Code	Feature	Base Price	\$346.05
			Additional Price	
		Model		
1	S	Standard	N/C	
	E	Enhanced <i>among others: Tare-function, backlit display</i>	\$81.82	
		Display		
2	8	LCD, 4-digit from -1,999 ... 9,999 <i>Type S</i>	N/C	
	C	LCD, 4½-digit from -1,999 ... 9,999 + 2nd Display <i>Type E</i>	N/C	
		Unit		
3	P	psi	N/C	
		Absolute or relative pressure		
4	G	Gauge	N/C	
	V	Compound	N/C	
		Pressure range		
5	330	-30 InHg ... 29 psi	\$31.46	
	360	-30 InHg ... 72 psi	\$31.46	
	411	-30 InHg ... 145 psi	\$31.46	
	321	0 ... 30 psi	N/C	
	341	0 ... 60 psi	N/C	
	399	0 ... 145 psi	N/C	
	421	0 ... 300 psi	N/C	
	441	0 ... 600 psi	N/C	
	499	0 ... 1,450 psi	\$31.46	
	514	0 ... 2,000 psi	\$31.46	
	521	0 ... 3,000 psi	\$31.46	
	534	0 ... 5,000 psi	\$31.46	
	552	0 ... 7,500 psi	\$31.46	
	569	0 ... 10,000 psi	\$31.46	
		Process connection		
6	ND	½ NPT	N/C	
	NB	¼ NPT	N/C	
	GD	G ½ B	N/C	
	GB	G ¼ B	N/C	
	HD	G ¼ A DIN 3852-E	N/C	
		Material of wetted parts		
7	K	Stainless steel, ceramic and sealing <i>< 600 psi</i>	N/C	
	Q	Stainless steel <i>> 1,450 psi</i>	N/C	
		Temperature range of medium		
8	D	-30 ... +85 °C (-22 ... +185 °F) <i>< 600 psi</i>	N/C	
	A	-30 ... +100 °C (-22 ... +212 °F) <i>≥ 1,450 psi</i>	N/C	

GENERAL PURPOSE

Electronic Pressure > General Purpose > DG-10

DG-10 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
9	Sealing		
	Z	Without	N/C
	1	NBR	N/C
	B	EPDM	N/C
10	Certificates		
	Z	Without	N/C
	I	NIST certificate	\$81.03
11	Protective rubber boot		
	Z	Without	N/C
	S	Vulcanized rubber protective boot	\$10.03
12	Additional Order Details		
	Z	Without	N/C
	T	Additional text	N/C

TOTAL PRICE

ELECTRONIC PRESSURE

Order Code: 1 2 3 4 5 6 7 8 9 10 11 12*

DG-10 - - **D** 1 - - - **Z** **Z** -

*Additional order details

GENERAL PURPOSE

Electronic Pressure > General Purpose > PSD-30

Type PSD-30 Pressure Transmitter with
Integral LED Display and
Programmable Solid-state Switches

Standard features

- Signal output: 4-20 mA 2-wire
- Switch outputs: 2, PNP
- Process connection: 1/4 NPT Male
- Electrical connection: 5 pin locking plug M12 x 1
- Approval: cULus

PSD-30 Part Numbers

Item Number	Description	List Price
50709267	PSD-30 15 psi 4-20 mA 1/4 NPT P/P 5PLCK	\$373.77
50709275	PSD-30 25 psi 4-20 mA 1/4 NPT P/P 5PLCK	
50709283	PSD-30 50 psi 4-20 mA 1/4 NPT P/P 5PLCK	
50709321	PSD-30 100 psi 4-20 mA 1/4 NPT P/P 5PLCK	
50709330	PSD-30 200 psi 4-20 mA 1/4 NPT P/P 5PLCK	
50709356	PSD-30 500 psi 4-20 mA 1/4 NPT P/P 5PLCK	
50709364	PSD-30 2,000 psi 4-20 mA 1/4 NPT P/P 5PLCK	
50709372	PSD-30 3,000 psi 4-20 mA 1/4 NPT P/P 5PLCK	
50709381	PSD-30 5,000 psi 4-20 mA 1/4 NPT P/P 5PLCK	\$405.21
50709402	PSD-30 -14.5 psi VAC 4-20 mA 1/4 NPT P/P 5PLCK	
50709411	PSD-30 -14.5/+100 psi 4-20 mA 1/4 NPT P/P 5PLCK	

Note: "P/P" means dual PNP/PNP switches.
N/N is NPN/NPN dual switches; single switches will show a single P or N in the description.

NOTE: Standard items shown in **bold print**. (Subject to prior sale)



GENERAL PURPOSE

Electronic Pressure > General Purpose > PSD-30

PSD-30 Smart Codes for Custom Order Configurations				
Field no.	Code	Feature	Base Price	\$373.77
1			Additional Price	
	Signal output			
	Q	Dual PNP switch output + 4...20mA	N/C	
	R	Dual PNP switch output + 0...10V	N/C	
	V	Dual NPN switch output + 4...20mA	N/C	
2	?	Other	On Inquiry	
	Unit			
	P	PSI (selectable bar/psi/mpa/kpa/kg/cm2)	N/C	
3	?	Other	On Inquiry	
	Pressure reference			
	G	Gauge	N/C	
	A	Absolute	\$30.19	
4	C	Compound	\$30.19	
	Pressure range			
	310	0...15psi 0...15 psia	N/C	
	320	-14.5 psi...15 psi	N/C	
	351	-14.5 psi...60 psi	N/C	
	379	-14.5 psi...100 psi	N/C	
	415	-14.5 psi...200 psi	N/C	
	422	-14.5 psi...300 psi	N/C	
	317	0...25 psi 0...25 psia	N/C	
	321	0...30 psi 0...30 psia	N/C	
	335	0...50 psi 0...50 psia	N/C	
	369	0...100 psi 0...100 psia	N/C	
	411	0...160 psi 0...160 psia	N/C	
	414	0...200 psi 0...200 psia	N/C	
	421	0...300 psi 0...300 psia	N/C	
	434	0...500 psi	N/C	
	469	0...1,000 psi	N/C	
	514	0...2,000 psi	N/C	
	521	0...3,000 psi	N/C	
	534	0...5,000 psi	N/C	
	555	0...8,000 psi	N/C	
	???	Other	On Inquiry	
5	Process connection			
	NB	1/4" NPT	N/C	
	HD	G 1/4 A DIN 3852-E	N/C	
	TB	G 1/4 female	N/C	
	??	Other	On Inquiry	
6	Process seal ring (not required for NPT)			
	C	Copper	N/C	
	S	Stainless steel	\$9.64	
	Z	Without	N/C	
	?	Other	On Inquiry	

GENERAL PURPOSE

Electronic Pressure > General Purpose > PSD-30

ELECTRONIC PRESSURE

PSD-30 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
7	Special design features		
	Z	Without	N/C
	E	Oil and grease free	On Inquiry
8	Electrical connection		
	M5	5 pin locking plug M12x1	N/C
	??	Other	On Inquiry
9	Instrument configuration		
	W	Factory standard switch settings	N/C
	K	Customer specific switch settings	On Inquiry
10	Approvals		
	W	c UL us	N/C
	Z	Without	N/C
11	Additional order details		
	YES	NO	
	1	Z	Quality certificates
12	T	Z	Additional text

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10 11 12
PSD-30 - - - - - -

*Additional order details _____

GENERAL PURPOSE

Electronic Pressure > General Purpose > TSD-30

ELECTRONIC PRESSURE

TSD-30 Smart Codes for Custom Order Configurations				
Field no.	Code	Feature	Base Price	\$300.77
			Additional Price	
		Signal output		
	Q	Dual PNP switch output + 4...20mA	N/C	
	R	Dual PNP switch output + 0...10V	N/C	
	V	Dual NPN switch output + 4...20mA	N/C	
1	?	Other	On Inquiry	
		Unit		
	F	Degrees °F (user selectable for °C)	N/C	
2	?	Other	On Inquiry	
		Temperature range		
	A	-4 ... +176 °F (user selectable for °C)	N/C	
3	?	Other	On Inquiry	
		Probe length		
	25	0.98" / 25 mm	N/C	
	50	1.97" / 50 mm	N/C	
	100	3.94" / 100 mm	N/C	
	150	5.91" / 150 mm	\$5.44	
	250	9.84" / 250 mm	\$10.95	
	300	13.78" / 350 mm	\$16.39	
4	????	Other	On Inquiry	
		Process connection		
	ND	1/2" NPT	N/C	
	NB	1/4" NPT	N/C	
	GT	G 1/2 A DIN 3852-E	N/C	
5	??	Other	On Inquiry	
		Process seal ring (not required for NPT)		
	Z	Without	N/C	
	1	NBR	N/C	
	L	FPM / FKM	N/C	
6	?	Other	On Inquiry	
		Electrical connection		
	M5	5 pin locking plug M12x1 (NEMA 5 / IP65)	N/C	
7	?	Other	On Inquiry	
		Instrument configuration		
	W	Factory default settings (see datasheet)	N/C	
8	K	Customer specifications	On Inquiry	
		Approvals		
	Z	Without	N/C	
9	?	Other	On Inquiry	
		Additional order details		
	YES	NO		
11	1	Z	Quality certificates	
12	T	Z	Additional text	

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10 11

TSD-30 - - - - - - -

*Additional order details

GENERAL PURPOSE

Electronic Pressure > General Purpose > LSD-30

ELECTRONIC PRESSURE

LSD-30 Smart Codes for Custom Order Configurations

Field no.	Code	Feature	Base Price	\$544.65
			Additional Price	
		Signal output		
	Q	Dual PNP switch output + 4...20mA	N/C	
	R	Dual PNP switch output + 0...10V	N/C	
	V	Dual NPN switch output + 4...20mA	N/C	
1	?	Other	On Inquiry	
		Display unit		
	I	Inch (user selectable for mm, cm, %)	N/C	
2	?	Other	On Inquiry	
		Probe length		
	250	250 mm / 9.84"	N/C	
	370	370 mm / 14.57"	\$87.47	
	410	410 mm / 16.14"	\$114.82	
	520	520 mm / 20.47"	\$196.84	
	730	730 mm / 27.74"	\$355.45	
3	???	Other	On Inquiry	
		Process connection		
	NE	3/4" NPT	N/C	
	HH	G 3/4 A DIN 3852-E	N/C	
4	??	Other	On Inquiry	
		Process seal ring (not required for NPT)		
	Z	Without (always with NPT)	N/C	
	1	NBR	N/C	
	L	FPM / FKM	N/C	
5	?	Other	On Inquiry	
		Electrical connection		
	M5	5 pin locking plug M12x1 (NEMA 4 / IP67)	N/C	
6	??	Other	On Inquiry	
		Instrument configuration		
	W	Factory default settings (see datasheet)	N/C	
7	K	Customer specifications	On Inquiry	
		Approvals		
	Z	Without	N/C	
8	?	Other	On Inquiry	
		Additional order details		
	YES	NO		
9	1	Z	Quality certificates	
10	T	Z	Additional text	

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10
LSD-30 - - - - - - -

*Additional order details

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > E-10

Type E-10 Explosion-proof Pressure Transmitter Vacuum to 15,000 psi




Standard features

- **Signal output:** 4-20mA, 2-wire or 1-5 V 3-wire low power
- **Supply voltage:** 10-30 VDC or 6-30 VDC (low power version)
- **Process connection:** 1/4" or 1/2" NPT male
- **Electrical connection:** 1/2" male conduit with cable or flying leads

E-10 Part Numbers

To use this table, first find the required process connection (1/4" or 1/2" NPT male), then the signal output (4-20 mA or 1-5 V), electrical connection (cable or flying lead) and the required pressure range.

Pressure Conn	1/4" NPT male				1/2" NPT male			
Signal Output	4-20 mA		1-5V 3-wire low power		4-20 mA		1-5V 3-wire low power	
Electrical Conn.	1/2" NPT male connection with:				1/2" NPT male connection with:			
	6 ft. cable	6 ft. leads	6 ft. cable	6 ft. leads	6 ft. cable	6 ft. leads	6 ft. cable	6 ft. leads
Compound ranges								
List Price	\$456.27	\$520.52	\$456.27	\$520.52	\$456.27	\$520.52	\$456.27	\$520.52
30"-0 inHg vac	52131793				4371130			
30"-0-30 psi	4217172	50333330			4365016	4365131	4365255	
30"-0-100 psi	50116703	50300156			4365026	4365149	4365271	
Gauge Ranges								
List Price	\$417.72	\$482.01	\$417.72	\$482.01	\$417.72	\$482.01	\$417.72	\$482.01
15psi		50989333	50792261	50034669	4365034	4365157	4365289	4365386
60 psi	4363082	50989341		50437178	4365042	4365166	4365297	50916572
100 psi	4363090	4363189	4363341	50391020	4365050	4365174	4365301	4365395
200 psi	4364844	50139061	4242150	4368653	4369633	50033948	50834967	4254174
300 psi	4363103	4363197	4363359	4368661	4365068	4365182	4365319	50707329
500 psi	4363111	4363200	4363367	4368679	4365076	4365190	4365327	4365408
1,000 psi	4363129	4363218	4363376	4365337	4365085	4365204	4365336	4365418
1,500 psi	4363137	4363226	4363384	4248337	4364169	4374130	4391256	4254166
2,000 psi	4363146	4363236	4363392	4368687	4365093	4365212	4365344	4254158
3,000 psi	4202506	4363244	4363406	4248329	4365106	4365220	4365352	4365425
5,000 psi	4363155	4363252	4363414	4394034	4365115	4365238	4365360	4365433
8,000 psi	4363163	4363260	50308696	50988906	50070568			50555022
10,000 psi	4363171	14077154	4363422	50136623	4365123	4365246	4365378	4260957
15,000 psi		52166112	4216673		50603914	52156303	4216681	50131613

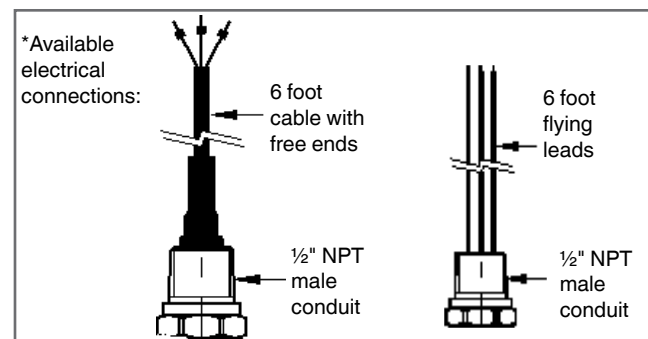

NOTE: Standard items shown in **bold print**. (Subject to prior sale)

Items without part numbers are available on special order.

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > E-10

E-10 Smart Codes for Custom Order Configurations

Field no.	Code	Feature	Base Price	\$417.72
1			Additional Price	
	Signal output			
	A	4 ... 20 mA, 2-wire	N/C	
	K	1 ... 5 V, 3-wire	N/C	
2	?	Other - please specify	On Inquiry	
	Unit			
	P	psi	N/C	
	3	psi absolute	\$38.56	
3	??	Other - please specify	On Inquiry	
	Pressure range			
	CA	-30 inHg ... 0	\$38.56	
	CD	-30 inHg ... 30 psi	\$38.56	
	CF	-30 inHg ... 60 psi	\$38.56	
	CH	-30 inHg ... 100 psi	\$38.56	
	CL	-30 inHg ... 200 psi	\$38.56	
	CN	0 psi ... 5 psi	N/C	
	CP	0 psi ... 10 psi	N/C	
	BC	0 psi ... 15 psi (0 psi ... 15 psi absolute)	N/C	
	CQ	0 psi ... 25 psi (0 psi ... 25 psi absolute)	N/C	
	BD	0 psi ... 30 psi (0 psi ... 30 psi absolute)	N/C	
	DA	0 psi ... 50 psi (0 psi ... 50 psi absolute)	N/C	
	BE	0 psi ... 60 psi (0 psi ... 60 psi absolute)	N/C	
	BF	0 psi ... 100 psi (0 psi ... 100 psi absolute)	N/C	
	BG	0 psi ... 160 psi	N/C	
	BH	0 psi ... 200 psi	N/C	
	DG	0 psi ... 250 psi	N/C	
	BI	0 psi ... 300 psi	N/C	
	DI	0 psi ... 500 psi	N/C	
	DJ	0 psi ... 750 psi	N/C	
	BN	0 psi ... 1,000 psi	N/C	
	BO	0 psi ... 1,500 psi	N/C	
	BP	0 psi ... 2,000 psi	N/C	
	BQ	0 psi ... 3,000 psi	N/C	
	BS	0 psi ... 5,000 psi	N/C	
	DS	0 psi ... 8,000 psi	N/C	
	BT	0 psi ... 10,000 psi	N/C	
	BU	0 psi ... 15,000 psi	N/C	
4	Process connection			
	NB	1/4" NPT	N/C	
	ND	1/2" NPT	N/C	
	??	Other - please specify	On Inquiry	

ELECTRONIC PRESSURE

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > E-10

E-10 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
5	Special design features		
	Z	Without	N/C
	L	Low power ¹	N/C
	?	Other - please specify	On Inquiry
6	Electrical connections		
	2X	1/2" NPT male conduit with cable (NEMA 4/IP 67)	N/C
	3X	1/2" NPT male conduit with flying leads (NEMA 4/IP 67)	\$64.25
	DX	ATEX 1/2" male conduit with factory sealed cable (NEMA 4/IP 67)	On Inquiry
	??	Other - please specify	On Inquiry
7	Cable length		
	6	6 feet	N/C
	B	2 meters (always with DX)	N/C
	?	Other - please specify	On Inquiry
8	Approvals		
	4	Ex d per ATEX (always with DX)	N/C
	7	Explosion-proof per FM and CSA (only with 2X, 3X)	N/C
9	Quality certificates		
	Z	Without	N/C
	I	NIST Certificate of Calibration	\$70.70
10	Additional order details		
	Z	Without	N/C
	T	Additional order details	On Inquiry

¹ Low power only with 1-5 V signal output (supply 6 ...30 V)

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10*

E-10 - - - - **G** -

*Additional order details

Type E-11 Explosion-proof Flush Diaphragm Pressure Transmitter Vacuum to 5,000 psi

Standard features

- Signal output: 4-20mA, 2-wire or 1-5 V 3-wire low power
- Supply voltage: 10-30 VDC or 6-30 VDC (low power version)
- Process connection: Non-clogging flush diaphragm G1B or G1/2B (depending on pressure)
- Electrical connection: 1/2" male conduit with cable or flying leads


E-11 Part Numbers

Pressure Conn.	G1B or G1/2B ¹			
Signal Output	4-20 mA		1-5V 3-wire low power	
Electrical Conn.	1/2" NPT male conduit connection with:			
	6 ft. cable*	6 ft. leads*	6 ft. cable	6 ft. leads*
Compound ranges				
List Price	\$494.83	\$559.07	\$494.83	\$559.07
30"-0-30 psi ¹	4373087			
30"-0-100 psi				
Gauge Ranges				
List Price	\$456.27	\$520.52	\$456.27	\$520.52
15 psi ¹	4365441	4235694	4365530	4365581
100 psi	4365459	4365492	4365548	4365599
200 psi	4252414	50045954	52014983	
500 psi	50132423			4365611
1,000 psi	4365467	4365506	4365556	4365629
1,500 psi	50132440			4365637
2,000 psi	50055712		50873601	4365646
3,000 psi	4365476	4365514	4365565	4365654
5,000 psi	4365484	4365522	4365573	4365662

NOTE:

¹ G1B for E-11 15 psi and 30inHg vacuum ranges, G1/2B for ranges > 30 psi.

Standard items shown in **bold print**. (Subject to prior sale).

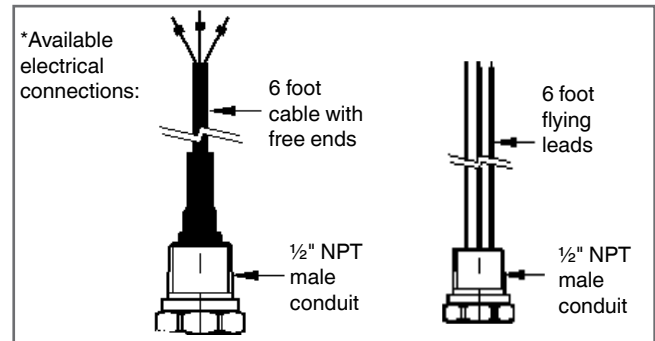

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > E-11

E-11 Smart Codes for Custom Order Configurations				
Field no.	Code	Feature	Base Price	\$456.27
1			Additional Price	
	Signal output			
	A	4 ... 20 mA, 2-wire	N/C	
	K	1 ... 5 V, 3-wire	N/C	
2	?	Other - please specify	On Inquiry	
	Unit			
	P	psi	N/C	
	3	psi absolute	\$38.56	
3	?	Other - please specify	On Inquiry	
	Pressure range			
	CA	-30 inHg ... 0	\$38.56	
	CD	-30 inHg ... 30 psi	\$38.56	
	CF	-30 inHg ... 60 psi	\$38.56	
	CH	-30 inHg ... 100 psi	\$38.56	
	CL	-30 inHg ... 200 psi	\$38.56	
	CN	0 psi ... 5 psi	N/C	
	CP	0 psi ... 10 psi	N/C	
	BC	0 psi ... 15 psi (0 psi ... 15 psi absolute)	N/C	
	CQ	0 psi ... 25 psi (0 psi ... 25 psi absolute)	N/C	
	BD	0 psi ... 30 psi	N/C	
	DA	0 psi ... 50 psi (0 psi ... 50 psi absolute)	N/C	
	BE	0 psi ... 60 psi	N/C	
	BF	0 psi ... 100 psi (0 psi ... 100 psi absolute)	N/C	
	BG	0 psi ... 160 psi	N/C	
	BH	0 psi ... 200 psi	N/C	
	DG	0 psi ... 250 psi	N/C	
	BI	0 psi ... 300 psi	N/C	
	DI	0 psi ... 500 psi	N/C	
	DJ	0 psi ... 750 psi	N/C	
	BN	0 psi ... 1,000 psi	N/C	
	BO	0 psi ... 1,500 psi	N/C	
	BP	0 psi ... 2,000 psi	N/C	
	BQ	0 psi ... 3,000 psi	N/C	
	BS	0 psi ... 5,000 psi	N/C	
	DS	0 psi ... 8,000 psi	N/C	
	??	Other - please specify	On Inquiry	
4	Process connection			
	85	G1B, flush diaphragm with O-ring (up to 25 psi)	N/C	
	86	G1/2B, flush diaphragm with O-ring (≥ 30 psi)	N/C	
	?	Other - please specify	On Inquiry	

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > E-11

ELECTRONIC PRESSURE

E-11 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
5	Material of wetted parts		
	1	Stainless steel and O-ring from NBR	N/C
	L	Stainless steel and O-ring from Viton®	\$15.59
	?	Other- please specify	On Inquiry
6	Special design features		
	Z	Without	N/C
	L	Low power ¹	N/C
7	Electrical connection		
	2X	1/2" NPT male conduit with free ends (NEMA 4/IP 67)	N/C
	DX	1/2" NPT male conduit with factory sealed cable (NEMA 4 IP 67)	On Inquiry
	3X	1/2" NPT male conduit with flying leads (NEMA 4 IP 67)	\$64.25
8	Cable length		
	6	6 feet	N/C
	B	2 meters (always with DX)	N/C
	?	Other- please specify	On Inquiry
9	Approvals		
	4	Ex d per ATEX (always with DX)	N/C
	7	Explosion-proof per FM and CSA (always with 2X, 3X)	N/C
10	Quality certificates		
	Z	Without	N/C
	I	NIST Certificate of Calibration	\$70.70
11	Additional order details		
	Z	Without	N/C
	T	Additional order details	On Inquiry

NOTE:

¹ Low power only with 1-5 V signal output (supply 6 ...30 V)

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10 11*

E-11 - - - - **G** -

*Additional order details

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > N-10

Type N-10 Non-incendive Pressure Transmitter Vacuum to 15,000 psi

Standard features

- **Signal output:** 4-20 mA 2-wire or 1-5 V 3-wire
- **Supply voltage:** 10-30 DC
(6-30 VDC for 1-5 V version)
- **Process connection:** 1/4 NPT male
- **Electrical connection:** 1/2" NPT male conduit
with 6 foot cable



ELECTRONIC PRESSURE

N-10 Part Numbers

Description			
Range	Part Number		List Price
	4-20 mA 2-wire	1-5 V-3-wire	
30" inHg vacuum	4348296	4354619	\$385.00
30"-0-30 psi	4348309	4354627	
30"-0-100 psi	4332431	4354636	
0-15 psi	4348317	4354644	\$345.00
0-30 psi	4348326	4354652	
0-60 psi	4348334	4354660	
0-100 psi	4348342	4354678	
0-200 psi	4348350	4354686	
0-300 psi	4348368	4354695	
0-500 psi	4346216	4354708	
0-1,000 psi	4332440	4354716	
0-1,500 psi	4338597	4354725	
0-2,000 psi	4348376	4354733	
0-3,000 psi	4347000	4354741	
0-5,000 psi	4347018	4354759	
0-8,000 psi	4348385	4354767	
0-10,000 psi	4348393	4354776	
0-15,000 psi	4348406	4354784	

NOTE: Standard items shown in **bold print**. (Subject to prior sale)

Items without part numbers are available on special order.

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > N-10

ELECTRONIC PRESSURE

N-10 Smart Codes for Custom Order Configurations			
Field no.	Code	Feature	
1			Base Price
			Additional Price
			\$345.00
	Signal output		
	A	4 ... 20 mA, 2-wire	N/C
2	K	1 ... 5 V, 3-wire	N/C
	?	Other - please specify	On Inquiry
	Unit		
	P	psi	N/C
3	3	psi absolute	\$37.00
	?	Other - please specify	On Inquiry
	Pressure range		
	CA	-30 inHg ... 0	\$37.00
	CD	-30 inHg ... 30 psi	\$37.00
	CH	-30 inHg ... 100 psi	\$37.00
	BC	0 psi ... 15 psi (0 psi ... 15 psi absolute)	N/C
	BD	0 psi ... 30 psi	N/C
	BE	0 psi ... 60 psi	N/C
	BF	0 psi ... 100 psi (0 psi ... 100 psi absolute)	N/C
	BH	0 psi ... 200 psi	N/C
	BI	0 psi ... 300 psi	N/C
	DI	0 psi ... 500 psi	N/C
	BN	0 psi ... 1,000 psi	N/C
	BO	0 psi ... 1,500 psi	N/C
	BP	0 psi ... 2,000 psi	N/C
	BQ	0 psi ... 3,000 psi	N/C
	BS	0 psi ... 5,000 psi	N/C
	DS	0 psi ... 8,000 psi	N/C
	BT	0 psi ... 10,000 psi	N/C
	BU	0 psi ... 15,000 psi	N/C
	??	Other - please specify	On Inquiry
4	Process connection		
	NB	1/4" NPT	N/C
	??	Other - please specify	On Inquiry
5	Special design features		
	Z	Without	N/C
	L	Low power ¹	N/C
	?	Other - please specify	On Inquiry
6	Electrical connection		
	2X	1/2" NPT male conduit with cable (NEMA 4X/ IP 67)	N/C
	??	Other - please specify	On Inquiry

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > N-10

N-10 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
7	Cable length		
	6	6 feet	N/C
	1	10 feet	\$12.87
	2	20 feet	\$38.56
	3	30 feet	\$64.25
	?	Other - please specify	On Inquiry
8	Approvals		
	F	FM, CSA non-incendive (always with 2X)	N/C
9	Quality certificates		
	Z	Without	N/C
	I	NIST Certificate of Calibration	\$70.70
10	Additional order details		
	Z	Without	N/C
	T	Additional order details	On Inquiry

NOTE:

¹ Low power only with 1-5 V signal output (supply 6 ...30 V).

TOTAL PRICE

ELECTRONIC PRESSURE

Order Code: 1 2 3 4 5 6 7 8 9 10*

N-10 - - - - **G** -

*Additional order details _____

Type N-11 Non-incendive Flush Diaphragm Pressure Transmitter Vacuum to 8,000 psi

Standard features

- Signal output: 4-20 mA 2-wire or 1-5 V 3-wire
- Supply voltage: 10-30 DC (6-30 VDC for 1-5 V version)
- Process connection: G1B or G1/2B flush diaphragm depending on Pressure range
- Electrical connection: 1/2" NPT male conduit with 6 foot cable

N-11 Part Numbers



Description			
Range	Part Number		List Price
	4-20 mA 2-wire	1-5 V-3-wire	
30"-0-30 psi	4372579		\$456.27
0-15 psi ¹	4354822	4354792	\$417.72
0-100 psi	4358428	4354806	
0-300 psi	4364410		
0-1,000 psi	4364690	4364428	
0-2,000 psi	4358436	4354814	
0-3,000 psi	4364509		

NOTES:

¹ Pressure ranges from 50 inWC to 30 psi are supplied with G1B flush process connections. See datasheet for details.

Standard items shown in **bold print**. (Subject to prior sale) Items without part numbers are available on special order.

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > N -11

N-11 Smart Codes for Custom Order Configurations				
Field no.	Code	Feature	Base Price	\$417.72
1			Additional Price	
	Signal output			
	A	4 ... 20 mA, 2-wire	N/C	
	K	1 ... 5 V, 3-wire	N/C	
2	?	Other - please specify	On Inquiry	
	Unit			
	P	psi	N/C	
	3	psi absolute	\$38.56	
3	?	Other - please specify	On Inquiry	
	Pressure range			
	CA	-30 inHg ... 0	\$38.56	
	CD	-30 inHg ... 30 psi	\$38.56	
	CH	-30 inHg ... 100 psi	\$38.56	
	BC	0 psi ... 15 psi (0 psi ... 15 psi absolute)	N/C	
	BD	0 psi ... 30 psi	N/C	
	BE	0 psi ... 60 psi	N/C	
	BF	0 psi ... 100 psi (0 psi ... 100 psi absolute)	N/C	
	BH	0 psi ... 200 psi	N/C	
	BI	0 psi ... 300 psi	N/C	
	DI	0 psi ... 500 psi	N/C	
	BN	0 psi ... 1,000 psi	N/C	
	BO	0 psi ... 1,500 psi	N/C	
	BP	0 psi ... 2,000 psi	N/C	
	BQ	0 psi ... 3,000 psi	N/C	
	BS	0 psi ... 5,000 psi	N/C	
	DQ	0 psi ... 6,000 psi	N/C	
	DR	0 psi ... 7,500 psi	N/C	
	DS	0 psi ... 8,000 psi	N/C	
4	??	Other - please specify	On Inquiry	
	Process connection			
	85	G1B, flush diaphragm with O-ring (50 inWC to 30 psi)	N/C	
5	86	G1/2B, flush diaphragm with O-ring ≥ (50 psi to 8,000 psi)	N/C	
	Material of wetted parts			
	1	Stainless steel and O-ring from NBR	N/C	
	B	Stainless steel and O-ring from EPDM	N/C	
6	L	Stainless steel and O-ring from Viton®	\$14.75	
	?	Other- please specify	On Inquiry	
7	Special design features			
	Z	Without	N/C	
	L	Low power ¹	N/C	
7	Electrical connection			
	2X	1/2" NPT male conduit with cable (NEMA 4X / IP 67)	N/C	
	??	Other- please specify	On Inquiry	

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > N-11

ELECTRONIC PRESSURE

N-11 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
8	Cable length		
	6	6 feet	N/C
	1	10 feet	\$12.87
	2	20 feet	\$38.56
	3	30 feet	\$64.25
9	Approvals		
	F	FM, CSA non-incendive (always with 2X)	N/C
10	Quality certificates		
	Z	Without	N/C
	I	NIST Certificate of Calibration	\$70.70
11	Additional order details		
	Z	Without	N/C
	T	Additional order details	On Inquiry

NOTE:
¹ Low power only with 1-5 V signal output (supply 6 ...30 V)

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10 11*
N-11 - - - - **G** -

*Additional order details _____

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > IS-20

Type IS-20 Intrinsically Safe Pressure Transmitter

Standard features

- **Signal output:** 4-20 mA 2-wire
- **Supply voltage:** 10-30 VDC
- **Process connection:** 1/2 NPT Male
- **Electrical connection:** DIN EN 175301-803 (DIN 43 650) with 1/2" NPT female conduit plug connector

IS-20 Part Numbers

Gauge Ranges		
Description		
Range	Part Number	List Price
0-5 psi	12127851	\$516.03
0-10 psi	12127877	
0-15 psi	12127885	
0-25 psi	12127893	
0-30 psi	12127906	
0-60 psi	12127914	
0-100 psi	12127922	
0-160 psi	12127940	
0-200 psi	12127966	
0-300 psi	12127974	
0-500 psi	12127982	
0-1,000 psi	12128040	
0-1,500 psi	12128058	
0-2,000 psi	12128066	
0-3,000 psi	12128074	
0-5,000 psi	12128104	
0-8,000 psi	12128112	
0-10,000 psi	12128121	



IS-20-S



IS-20-F

ELECTRONIC PRESSURE

Vacuum & Compound Ranges

Description		
Range	Part Number	List Price
30"-0 HgVac	12127796	\$607.94
30"-0-30 psi	12127833	
30"-0-60 psi	12127841	

Absolute Pressure Ranges

Description		
Range	Part Number	List Price
0-100 psia	12128147	\$607.94

IS-20-F Part Numbers

Gauge Ranges		
Description		
Range	Part Number	List Price
0-100 psi	12128554	\$685.70
0-1,000 psi	12128687	
0-3,000 psi	12128732	

NOTE: Standard items shown in **bold print**. (Subject to prior sale)

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > IS-20

IS-20 Smart Codes for Custom Order Configurations

Field no.	Code	Feature		
1	Model		Base Price	
	S	Standard version	\$516.03	
	F	With integral junction box	\$685.64	
	H	High pressure version		\$2106.19
2	Unit		Additional price	
	P	psi	N/C	-
	N	InWC	N/C	-
	3	psi absolute	\$91.90	-
	?	Other - please specify	On Inquiry	-
3	Pressure range			
	CA	-30 inHg ... 0	\$91.90	-
	CD	-30 inHg ... 30 psi	\$91.90	-
	CF	-30 inHg ... 60 psi	\$91.90	-
	CH	-30 inHg ... 100 psi	\$91.90	-
	CK	-30 inHg ... 160 psi	\$91.90	-
	CL	-30 inHg ... 200 psi	\$91.90	-
	GG	0 InWC ... 50 InWC	N/C	-
	GU	0 InWC ... 100 InWC	N/C	-
	CN	0 psi ... 5 psi	N/C	-
	CP	0 psi ... 10 psi	N/C	-
	BC	0 psi ... 15 psi (0 psi ... 15 psi absolute)	N/C	-
	CQ	0 psi ... 25 psi (0 psi ... 25 psi absolute)	N/C	-
	BD	0 psi ... 30 psi	N/C	-
	DA	0 psi ... 50 psi (0 psi ... 50 psi absolute)	N/C	-
	BE	0 psi ... 60 psi	N/C	-
	BF	0 psi ... 100 psi (0 psi ... 100 psi absolute)	N/C	-
	BG	0 psi ... 160 psi	N/C	-
	BH	0 psi ... 200 psi	N/C	-
	DG	0 psi ... 250 psi (0 psi ... 250 psi absolute)	N/C	-
	BI	0 psi ... 300 psi	N/C	-
	BK	0 psi ... 400 psi	N/C	-
	DI	0 psi ... 500 psi	N/C	-
	BL	0 psi ... 600 psi	N/C	-
	DJ	0 psi ... 750 psi	N/C	-
	BN	0 psi ... 1,000 psi	N/C	-
	BO	0 psi ... 1,500 psi	N/C	-
	BP	0 psi ... 2,000 psi	N/C	-
	BQ	0 psi ... 3,000 psi ¹	N/C	-
	BS	0 psi ... 5,000 psi	N/C	-
	DS	0 psi ... 8,000 psi	N/C	-
	BT	0 psi ... 10,000 psi	N/C	-
	BU	0 psi ... 15,000 psi	N/C	-
	??	Other-up to maximum specified pressure range	On Inquiry	-
		0 psi ... 25,000 psi		On Inquiry
		0 psi ... 60,000 psi		On Inquiry
		0 psi ... 75,000 psi		On Inquiry
		0 psi ... 85,000 psi		On Inquiry
		0 psi ... 100,000 psi		On Inquiry
		0 psi ... 115,000 psi		On Inquiry

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > IS-20

IS-20 Smart Codes for Custom Order Configurations continued					
Field no.	Code	Feature	Additional Price		
4	Process connection				
	GB	G 1/4 B	N/C	-	
	GD	G 1/2 B	N/C	-	
	NB	1/4 NPT	N/C	-	
	ND	1/2 NPT	N/C	-	
	CS	Diaphragm seal - <i>price see diaphragm seal</i>	N/C	-	
	ML	M16 x 1.5 female, w/sealing cone <i>only for pressure range over 24,000 psi</i>	-	N/C	
	VZ	9/16 - 18 UNF female F250-C <i>only for pressure range over 24,000 psi</i>	-	N/C	
	MP	M20 x 1.5 female, w/sealing cone <i>only for pressure range over 24,000 psi</i>	-	N/C	
??	Other - please specify	On Inquiry	-		
5	Special design features				
	Z	Without	N/C		
	G	Suitable for food	\$63.65	-	
	A	Oxygen, oil and grease free ¹	On Inquiry	-	
	?	Other - please specify	On Inquiry	-	
6	Accuracy				
	G	+/- 0.25% B.F.S.L.	N/C		
	K	+/- 0.125% B.F.S.L. (> 100 inWC)	\$49.51	-	
7	Electrical connection				
	AX	4 Pin L-plug DIN 175301-803 with 1/2" NPT female conduit (NEMA 5/IP 65)	N/C	-	N/C
	A4	4 Pin L-plug DIN 175301-803 with Pg 9 (NEMA 5 / IP 65)	\$6.52	-	\$6.52
	DL	Cable with free ends (NEMA 4 / IP 67)	\$67.88	-	\$67.88
	XM	Submersible cable (NEMA 6 / IP 68)	\$176.76	-	\$176.76
	O4	4 Pin MIL plug PT02E-8-4P (NEMA 5 / IP 65)	\$91.90	-	\$91.90
	C6	6 Pin MIL plug PT02E-10-6P (NEMA 5 / IP 65)	\$91.90	-	\$91.90
	FE	1/2" NPT female conduit (IP67)	-	N/C	\$120.21
	FH	Nickel plated brass cable gland (IP68)	-	N/C	\$120.21
	FC	Stainless steel cable gland (IP68)	-	\$42.46	\$1,421.57
??	Other - please specify	On Inquiry			
8	Cable length				
	Z	Without (always with plug connection)	N/C		
	Y	5 feet	N/C	-	N/C
	1	10 feet	\$14.16	-	\$14.16
	2	20 feet	\$42.46	-	\$42.46
	3	30 feet	\$70.70	-	\$70.70
	4	40 feet	\$98.95	-	\$98.95
	5	50 feet	\$127.25	-	\$127.25
	?	50 feet	On Inquiry		
9	Temperature range of medium				
	U	-20 ... +80 °C (-4 ... +176 °F)	N/C		
	8	-40 ... +150 °C (-40 ... +302 °F)	\$113.11	-	
	9	-40 ... +200 °C (-40 ... +392 °F)	\$169.61	-	

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > IS-20

ELECTRONIC PRESSURE

IS-20 Smart Codes for Custom Order Configurations continued						
Field no.	Code	Feature	Additional Price			
10	SIL2					
	Z	Without	N/C			
	S	SIL2 according to IEC61508 / IEC61511	\$65.47			
11	Approvals					
	1	EEx ia I M1 + 1/2G, 2G incl. FM, CSA & ATEX	N/C			
	A	EEx ia II C T6 1/2G, 2G per ATEX incl. FM & CSA ²	N/C			
	D	EEx IP6X 1/2D, 2D + 1/2 G, 2G +M1 per ATEX incl. FM and CSA ^{3, 4}	N/C	-	N/C	
	S	EEx ia II C T6 1/2G per ATEX incl. FM, CSA and ship approval GL	\$56.55		-	
12	Quality certificates					
	Z	Without	N/C			
	I	NIST Certificate of Calibration (always with 0.125% accuracy)	\$77.75			
13	Digital display					
	Z	Without	N/C			
	I	Digital display (order separately)	On Inquiry			
14	Additional order details					
	Z	Without (always with plug connection)	N/C			
	T	Additional text	On Inquiry			

NOTES:

- ¹ Maximum media temperature is -4 ... +140° F (-20 ... +60° C)
Pressure ranges 100 InWC to 300 psi (Field 5, Code A)
- ² Only available in MIL Plug version (Field 7, Codes O4 and C6)
- ³ Only available in IP68 version
- ⁴ Maximum media temperature is -4 ... +176° F (-20 ... +80° C) (Field 9, Code U)

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10 11 12 13 14*

IS-20 - - - - **A** -

*Additional order details

Type IS-21 Intrinsically Safe Flush Diaphragm Pressure Transmitter

Standard features

- **Signal output:** 4-20 mA 2-wire
- **Supply voltage:** 10-30 DC
- **Process connection:** G1B or G1/2B depending upon pressure range
- **Electrical connection:** DIN EN 175301-803 (DIN 43 650) with 1/2" NPT female conduit plug connector



IS-21-S Part Numbers

Gauge Ranges		
Description		
Range	Part Number	List Price
0-5 psi ¹	12128252	\$586.68
0-10 psi ¹	12128287	
0-15 psi ¹	50937961	
0-30 psi ¹	12128325	
0-50 psi	12128333	
0-100 psi	12128368	
0-1,000 psi	12128376	
0-3,000 psi	14003299	
0-5,000 psi	12128503	
0-8,000 psi	12128538	

NOTES:

¹ Pressure ranges from 50 inWC to 30 PSI are supplied with G1B flush process connections; see datasheet for details

Standard items shown in **bold print**. (Subject to prior sale)

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > IS-21

IS-21 Smart Codes for Custom Order Configurations

Field no.	Code	Feature	
1	Signal output		Base Price
	S	Standard version	\$586.68
	F	Field case / integral junction box	\$759.39
2	Unit		Additional Price
	P	PSI	N/C
	N	InWC	N/C
	3	psi absolute	\$91.90
	?	Other - please specify	On Inquiry
3	Pressure range		
	CA	-30 inHg ... 0	\$91.90
	CD	-30 inHg ... 30 psi	\$91.90
	CF	-30 inHg ... 60 psi	\$91.90
	CH	-30 inHg ... 100 psi	\$91.90
	CK	-30 inHg ... 160 psi	\$91.90
	CL	-30 inHg ... 200 psi	\$91.90
	GG	0 InWC ... 50 InWC	N/C
	GU	0 InWC ... 100 InWC	N/C
	CN	0 psi ... 5 psi	N/C
	CP	0 psi ... 10 psi	N/C
	BC	0 psi ... 15 psi (0 psi ... 15 psi absolute)	N/C
	CQ	0 psi ... 25 psi (0 psi ... 25 psi absolute)	N/C
	BD	0 psi ... 30 psi	N/C
	DA	0 psi ... 50 psi (0 psi ... 50 psi absolute)	N/C
	BE	0 psi ... 60 psi	N/C
	BF	0 psi ... 100 psi (0 psi ... 100 psi absolute)	N/C
	BG	0 psi ... 160 psi	N/C
	BH	0 psi ... 200 psi	N/C
	DG	0 psi ... 250 psi (0 psi ... 250 psi absolute)	N/C
	BI	0 psi ... 300 psi	N/C
	DI	0 psi ... 500 psi	N/C
	BL	0 psi ... 600 psi	N/C
	DJ	0 psi ... 750 psi	N/C
	BN	0 psi ... 1,000 psi	N/C
	BO	0 psi ... 1,500 psi	N/C
	BP	0 psi ... 2,000 psi	N/C
	BQ	0 psi ... 3,000 psi	N/C
	BS	0 psi ... 5,000 psi	N/C
	DS	0 psi ... 8,000 psi	N/C
	?3	Other-up to maximum specified pressure range	N/C

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > IS-21

IS-21 Smart Codes for Custom Order Configurations continued				
Field no.	Code	Feature	Additional Price	
4	Process connection			
	85	G 1 B, flush diaphragm with O-ring (up to 25 psi)	N/C	
	86	G 1/2 B, flush diaphragm with O-ring (≥ 30 psi)	N/C	
	??	Other - please specify	On Inquiry	
5	Material of wetted parts			
	1	Stainless steel, NBR O-ring ¹	N/C	
	L	Stainless steel, Viton® O-ring	\$15.59	
	S	Hastelloy® C4, Viton® O-ring	\$244.26	
	?	Other - please specify	On Inquiry	
6	Special design features			
	Z	Without	N/C	
	G	Suitable for food	\$63.65	
7	Accuracy			
	G	+/- 0.25% B.F.S.L.	N/C	
	K	+/- 0.125% B.F.S.L. (> 100 inWC)	\$49.51	
8	Electrical connection			
	A4	4 Pin L-plug DIN 43 650 with PG 9 (NEMA 5 / IP 65)	\$6.52	-
	AX	4 Pin L-plug DIN 43 650 with 1/2" NPT female conduit (NEMA 5 / IP 65)	N/C	-
	DL	Cable with free ends (NEMA 4 / IP 67)	\$67.88	-
	XM	Submersible cable (NEMA 6 / IP 68)	\$176.87	-
	O4	4 Pin MIL Plug PT02E-8-4P (NEMA 5 / IP 65)	\$91.90	-
	C6	6 Pin MIL Plug PT02E-10-6P (NEMA 5 / IP 65)	\$91.90	-
	FE	1/2" NPT female conduit (IP67)	-	N/C
	FH	Nickel plated brass cable gland (IP68)	-	
	FC	Stainless steel cable gland (IP68)	-	\$42.66
??	Other - please specify	On Inquiry	-	
9	Cable length			
	Z	Without (always with plug version)	N/C	
	Y	5 feet	N/C	-
	1	10 feet	\$14.16	-
	2	20 feet	\$42.46	-
	3	30 feet	\$70.70	-
	4	40 feet	\$98.95	-
	5	50 feet	\$127.25	-
	?	Other - please specify	On Inquiry	-

HAZARDOUS AREA

Electronic Pressure > Hazardous Area > IS-21

ELECTRONIC PRESSURE

IS-21 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
10	Temperature range of medium		
	U	-20 ... +80 °C (-4 ... +176 °F)	N/C
	C	-20 ... +150 °C (-4 ... +302 °F) with cooling element	On Inquiry
11	SIL2		
	Z	Without	N/C
	S	SIL2 according to IEC61508 / IEC61511	\$65.47
12	Approvals		
	1	EEx ia I M1 + 1/2G, 2G incl. FM, CSA & ATEX	N/C
	A	EEx ia II C T6 1/2G, 2G per ATEX incl. FM & CSA ²	N/C
	D	EEx IP6X 1/2D, 2D + 1/2 G, 2G +M1 per ATEX incl. FM and CSA ^{3,4}	N/C
	S	EEx ia II C T6 1/2G per ATEX incl. FM, CSA and ship approval GL	\$56.55
13	Quality certificates		
	Z	Without	N/C
	I	NIST Certificate of Calibration (always with 0.125% accuracy)	\$77.76
14	Digital display		
	Z	Without	N/C
	I	Digital display (order separately)	On Inquiry
15	Additional order details		
	Z	Without (always with plug connection)	N/C
	T	5 feet	On Inquiry

NOTES:

- ¹ Not available with cooling element option (Field 10, Code S)
² Only available in MIL Plug version (Field 8, Codes O4 and C6)
³ Only available in IP68 version
⁴ Maximum media temperature is -4 ... +176° F (-20 ... +80° C) (Field 10, Code Z)

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15*

IS-21 - - - - **A** -

*Additional order details

Type IS-20-VR Hazardous Area Pressure Transmitter for Low Pressure Applications

Standard features

- Signal output: 4-20 mA 2-wire
- Supply voltage: 10-30 VDC
- Process connection: 1/2" NPT Male with enlarged port
- Electrical connection: 1/2" NPT Male conduit with 5 ft. cable



ELECTRONIC PRESSURE

IS-20-VR Part Numbers

Gauge Ranges		
Description		
Range	Part Number	List Price
0 ...12 oz / in ²	14034850	\$697.76
0 ...16 oz / in ²	13464541	

Compound Range		
Description		
Range	Part Number	List Price
-4 ... 0 ...+12 oz / in ²	14034851	\$697.76

SUBMERSIBLE LIQUID LEVEL

Electronic Pressure > Submersible Liquid Level > LS-10

Type LS-10 Submersible Liquid Level Transmitter 100 InWC to 100 psi

See pages 85 and 86 for additional accessories for this item.



Standard features

- **Signal output:** 4-20 mA 2-wire
- **Supply voltage:** 10-30 VDC
- **Process connection:** G1/2B with removable protective cap
- **Electrical connection:** Vented polyurethane cable (must specify length)

Important Ordering Instructions: Specify the level transmitter part number and cable length part number corresponding to the total required cable length. For example, a 100 InWC level transmitter with 40 feet of cable should be ordered as 4262761/4347931 with a list price of \$617.12

Pressure range part number AND cable length part number must be specified on every order!

Cable Length Part Numbers

Gauge Ranges								
Description								
Length	Part #	Price	Length	Part #	Price	Length	Part #	Price
5 feet	4347868	included	60 feet	4347974	\$194.38	130 feet	4348075	\$441.86
10 feet	4347876	\$17.68	65 feet	4347982	\$212.06	140 feet	4348083	\$477.25
15 feet	4347885	\$35.36	70 feet	4347990	\$229.73	150 feet	4348091	\$512.50
20 feet	4347893	\$53.03	75 feet	4348006	\$247.41	160 feet	4348105	\$547.85
25 feet	4347906	\$73.68	80 feet	4348016	\$265.09	170 feet	4348113	\$583.10
30 feet	4347915	\$88.39	85 feet	4348024	\$282.77	180 feet	4348121	\$618.51
35 feet	4347923	\$106.06	90 feet	4348032	\$300.44	190 feet	4348139	\$653.86
40 feet	4347931	\$123.68	95 feet	4360903	\$318.12	200 feet	4348147	\$689.21
45 feet	4347949	\$141.41	100 feet	4348040	\$335.85	250 feet	4364479	\$865.97
50 feet	4347957	\$159.09	110 feet	4348058	\$371.31	300 feet	4366340	\$1,042.73
55 feet	4347966	\$184.18	120 feet	4348066	\$406.44	Contact factory for lengths over 300 feet		


LS-10 Standard Ranges

Gauge Ranges		
Description		
Range	Part Number	List Price
0-100 inWC	4262761	\$493.44
0-150 inWC	4262779	
0-250 inWC	4262787	
0-400 inWC	4262795	
0-5 psi	4262809	
0-10 psi	4262817	
0-15 psi	4262825	
0-25 psi	4262833	
0-30 psi	4262841	
0-50 psi	4262850	
0-100 psi	4262868	

NOTES:

LS-10 "Ready-to-Ship" submersible transmitters require assembly from factory stocked components and usually ship in three days or less.

Stock items shown in **bold print**.

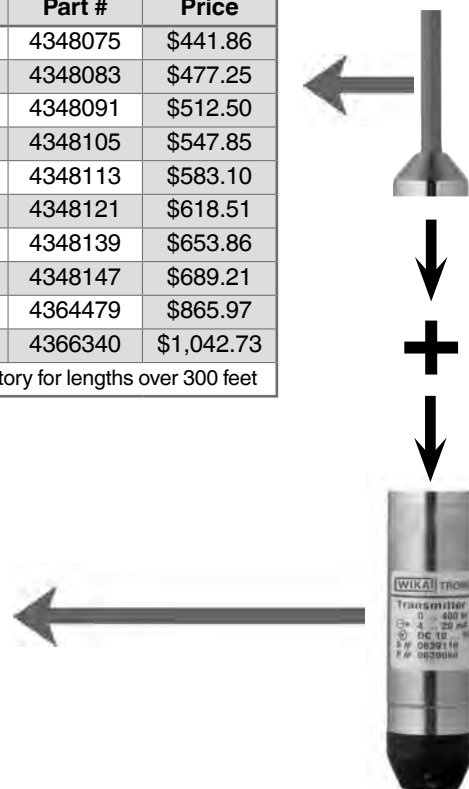

SUBMERSIBLE LIQUID LEVEL

Electronic Pressure > Submersible Liquid Level > LH-10

Type LH-10 Submersible High Performance Liquid Level Transmitter 50 InWC to 400 psi

Standard features

- **Signal output:** 4-20 mA 2-wire
- **Supply voltage:** 10-30 VDC
- **Process connection:** G1/2B with removable protective cap
- **Electrical connection:** 40 ft. vented polyurethane cable

LH-10 Part Numbers

Gauge Ranges		
Description		
Range	Part Number	List Price
0-50 inWC	9699703	\$699.84
0-100 inWC	9699711	
0-150 inWC	9699729	
0-250 inWC	9699737	
0-400 inWC	9699745	
0-5 psi	8371846	
0-10 psi	14079101	
0-15 psi	9736225	
0-25 psi	9699762	
0-50 psi	9699770	
0-100 psi	9699788	



ELECTRONIC PRESSURE

SUBMERSIBLE LIQUID LEVEL

Electronic Pressure > Submersible Liquid Level > LH-10

ELECTRONIC PRESSURE

LH-10 Smart Codes for Custom Order Configurations			
Field no.	Code	Feature	
1			Base Price
			\$575.03
			Additional Price
	Signal output		
	A	4 ... 20 mA, 2-wire (supply: 10-30 VDC)	N/C
	B	0 ... 20 mA, 3-wire	\$91.90
	F	0 ... 10 V, 3-wire (supply: 14-30 VDC)	\$91.90
	G	0 ... 5 V, 3-wire	\$91.90
2	S	0.5 ... 2.5 V, 3-wire (supply: 5-30 VDC)	\$91.90
	?	Other - please specify	On Inquiry
	Unit		
	P	psi	N/C
3	N	InWC	N/C
	?	Other - please specify	On Inquiry
	Pressure range		
	GG	0 InWC ... 50 InWC	N/C
4	GU	0 InWC ... 100 InWC	N/C
	GV	0 InWC ... 150 InWC	N/C
	GW	0 InWC ... 250 InWC	N/C
	GX	0 InWC ... 400 InWC	N/C
	CN	0 psi ... 5 psi	N/C
	CP	0 psi ... 10 psi	N/C
	BC	0 psi ... 15 psi	N/C
	CQ	0 psi ... 25 psi	N/C
	DA	0 psi ... 50 psi	N/C
	BF	0 psi ... 100 psi	N/C
	BG	0 psi ... 160 psi	N/C
	BH	0 psi ... 200 psi	N/C
	DG	0 psi ... 250 psi	N/C
	BI	0 psi ... 300 psi	N/C
	BK	0 psi ... 400 psi	N/C
	??	Other - please specify	On Inquiry
	Process connection		
	GD	G1/2B with removable protective cap	N/C
	Special Design Features		
5	Z	Without	N/C
	K	FEP cable ³	\$91.90
	O	Lightning protection according to EN 61000-4-5 ¹	\$106.06
	J	Temperature measurement Pt 100, 4-wire ¹	\$176.76
	Y	Lightning protection and Pt. 100 ¹	\$282.77
	2	Hastelloy® C4 ^{2, 4}	\$318.07
	?	Other - please specify	On Inquiry

SUBMERSIBLE LIQUID LEVEL

Electronic Pressure > Submersible Liquid Level > LH-10

LH-10 Smart Codes for Custom Order Configurations continued				
Field no.	Code	Feature	Price	
6	Cable length		PUR	FEP
	Y	5 feet	N/C	
	1	10 feet	\$17.68	\$24.77
	2	20 feet	\$53.03	\$74.23
	3	30 feet	\$88.39	\$123.68
	4	40 feet	\$123.68	\$173.18
	5	50 feet	\$159.09	\$222.69
	?	Other - price per foot	\$3.58	\$4.91
Additional Price				
7	Quality certificates			
	?	Without	N/C	
8	Digital Display			
	?	Without	N/C	
9	Additional Order Details			
	Z	Without	N/C	
	T	Additional order details	On Inquiry	

NOTES:

¹ Only with Pur (polyurethane) cable

² Only with FEP (Teflon®) cable

³ FEP (Fluorinated Ethylene Propylene), also known by the Dupont trade name of Teflon®

⁴ Must use G 1/4 B Female process connection

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9*

LH-10 - - - - -

*Additional order details _____

SUBMERSIBLE LIQUID LEVEL

Electronic Pressure > Submersible Liquid Level > LH-20

ELECTRONIC PRESSURE

LH-20 Smart Codes for Custom Order Configurations				
Field no.	Code	Feature		
1			Base Price	\$945.97
			Additional Price	
	Unit			
	N	inWC	N/C	
	P	psi	N/C	
2	?	Other - please specify	On Inquiry	
	Pressure reference			
	G	Gauge	N/C	
	A	Absolute (not with inWC ranges)	\$80.10	
3	?	Other - please specify	On Inquiry	
	Pressure range			
	212	0 InWC ... 50 InWC	N/C	
	225	0 InWC ... 100 InWC	N/C	
	237	0 InWC ... 150 InWC	N/C	
	262	0 InWC ... 250 InWC	N/C	
	234	0 psi ... 5 psi	N/C	
	269	0 psi ... 10 psi	N/C	
	310	0 psi ... 15 psi	N/C	
	317	0 psi ... 25 psi 0 psi ... 25 psia	N/C	
	335	0 psi ... 50 psi 0 psi ... 50 psia	N/C	
	369	0 psi ... 100 psi 0 psi ... 100 psia	N/C	
	411	0 psi ... 160 psi 0 psi ... 160 psia	N/C	
	414	0 psi ... 200 psi 0 psi ... 200 psia	N/C	
	421	0 psi ... 300 psi 0 psi ... 300 psia	N/C	
	???	Other - please specify	On Inquiry	
4	Cable material			
	A	PUR (Polyurethane)	N/C	
	B	FEP (Fluorinated Ethylene Propylene)	\$170.89	
	C	PE (Polyethylene)	N/C	
5	Unit of cable length			
	F	Feet	N/C	
	?	Other - please specify	On Inquiry	
6	Cable length			
		PUR per foot price	\$1.87	
		FEP per foot price	\$9.62	
		PE per foot price	\$2.13	
		Cable length to nearest foot (Example: 40 feet = 0040) Price _____ x Length _____ =	(Total cable price)	
7	Signal output			
	A	4 ... 20 mA 2-wire	N/C	
	R	4 ... 20 + Hart + PT 100	\$186.91	
8	Quality certificates			
	M	± 0.1% B.F.S.L.	N/C	
	P	± 0.05 B.F.S.L.	\$150.24	
9	Housing			
	S	Stainless steel	N/C	
	T	Titanium	\$300.49	

SUBMERSIBLE LIQUID LEVEL

Electronic Pressure > Submersible Liquid Level > LH-20

LH-20 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
10	Approvals		
	A	ATEX	\$42.29
	I	IECEX	\$42.29
	Z	Without	N/C
	?	Other - please specify	On Inquiry
11	Protection type		
	E	EX ia (intrinsic safety)	N/C
	Z	Without	N/C
	?	Other	On Inquiry
12	Atmosphere		
	GA	Gas Zone 0 and 1 (1G, 2G) (With ATEX)	N/C
	GB	Gas Zone 0 (1G) with (IECEX)	N/C
	ZZ	Without	N/C
	??	Other	On Inquiry
13	Other approvals		
	Z	Without	N/C
	G	Ship approval (GL)	\$42.29
	?	Other	On Inquiry
14	Potable water conformance certificate		
	Z	Without	N/C
	K	KTW, ACS	\$55.65
15	Certificate		
	Z	Without	N/C
	K	With test protocols	\$72.33
16	Process connection		
	LS	M14 x 1 protective cap	N/C
	LT	Flush diaphragm	\$42.29
	??	Other	On Inquiry
17	Sensor seal material		
	K	Dual FKM (VP2 / A)	N/C
	E	Dual EPDM (A+P 75.5 / KW75F)	\$27.82
18	Additional order details		
	Z	Without	N/C
	T	Additional text	On Inquiry

ELECTRONIC PRESSURE

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18
LH-20 - - - - - - - -

*Additional order details

SUBMERSIBLE LIQUID LEVEL

Electronic Pressure > Submersible Liquid Level > IL-10

Type IL-10 Intrinsically Safe High Performance Submersible Liquid Level Transmitter 50 inWC to 400 psi

Standard features

- **Signal output:** 4-20 mA 2-wire
- **Supply voltage:** 10-30 VDC
- **Process connection:** G 1/2 B



ELECTRONIC PRESSURE

IL-10 Smart Codes for Custom Order Configurations

Field no.	Code	Feature	Base Price	\$883.65
1			Additional Price	
	Unit			
	P	psi	N/C	
	N	InWC	N/C	
2	?	Other - please specify	On Inquiry	
	Pressure range			
	GG	0 inWC ... 50 inWC	N/C	
	GU	0 inWC ... 100 inWC	N/C	
	GV	0 inWC ... 150 inWC	N/C	
	GW	0 inWC ... 250 inWC	N/C	
	GX	0 inWC ... 400 inWC	N/C	
	CN	0 psi ... 5 psi	N/C	
	CP	0 psi ... 10 psi	N/C	
	BC	0 psi ... 15 psi	N/C	
	CQ	0 psi ... 25 psi	N/C	
	BD	0 psi ... 30 psi	N/C	
	BE	0 psi ... 60 psi	N/C	
	BF	0 psi ... 100 psi	N/C	
	BG	0 psi ... 160 psi	N/C	
	BH	0 psi ... 200 psi	N/C	
	BI	0 psi ... 300 psi	N/C	
	BK	0 psi ... 400 psi	N/C	
	??	Other - please specify	On Inquiry	
3	Process connection			
	GD	G 1/2 B	N/C	
	??	Other - please specify	On Inquiry	

SUBMERSIBLE LIQUID LEVEL

Electronic Pressure > Submersible Liquid Level > IL-10

IL-10 Smart Codes for Custom Order Configurations continued				
Field no.	Code	Feature	Additional Price	
4	Special design features			
	Z	Without	N/C	
	2	Hastelloy® C4 ²	\$305.30	
	K	FEP cable ¹	\$91.90	
	?	Other - please specify	On Inquiry	
5	Accuracy			
	G	+/- 0.25% B.F.S.L.	N/C	
	K	+/- 0.125% B.F.S.L.	\$68.98	
6	Cable length			
		Cable material	PUR	FEP
	Y	5 feet	N/C	
	1	10 feet	\$17.68	\$24.77
	2	20 feet	\$53.03	\$74.23
	3	30 feet	\$88.39	\$123.68
	4	40 feet	\$123.68	\$173.18
	5	50 feet	\$159.09	\$222.69
	?	Other - price per foot	\$3.58	\$4.91
	Approvals			
	2	EEx IP6X 1D, 1G, M1 per ATEX incl. FM and CSA	N/C	
	U	EEx IP6X 1D, 1G, M1 per ATEX incl. FM, CSA and ship approval GL	\$54.05	
	?	Other - please specify	On Inquiry	
7	Quality certificates			
	Z	Without	N/C	
	1	Other - please specify	On Inquiry	
8	Digital Display			
	?	Without	N/C	
9	Additional Order Details			
	Z	Without	N/C	
	T	Additional order details	On Inquiry	

NOTES:

¹ FEP (Fluorinated Ethylene Propylene), also known by the Dupont trade name of Teflon®

² Must use G 1/4 B Female process connection

TOTAL PRICE

Order Code:

IL-10 - A - - - -

*Additional order details

SPECIAL PURPOSE

Electronic Pressure > Special Purpose > MH-2

Type MH-2 Mobile Hydraulic Pressure Transmitter 1,000 psi to 8,000 psi



Note: 50 piece minimum order quantity applies.

MH-2 Smart Codes for Custom Order Configurations

Field no.	Code	Feature	Base Price	Additional Price
				\$138.58
1	Signal output			
	A	4 ... 20 mA, 2-wire (supply: 10-36 VDC)	N/C	
	K	1 ... 5 V, 3-wire (supply: 8-36 VDC)	N/C	
	F	0 ... 10, 3-wire (supply: 14-36 VDC)	N/C	
	W	0.5 - 4.5V ratiometric (supply: 5 VDC +/- 10%)	N/C	
	?	Other - please specify	On Inquiry	
2	Unit			
	P	psi	N/C	
	?	Other - please specify	On Inquiry	
3	Pressure range			
	BN	0 psi ... 1,000 psi	N/C	
	BO	0 psi ... 1,500 psi	N/C	
	BQ	0 psi ... 3,000 psi	N/C	
	BS	0 psi ... 5,000 psi	N/C	
	DS	0 psi ... 8,000 psi	N/C	
	??	Other - please specify	On Inquiry	
4	Pressure connection			
	NB	1/4" NPT	N/C	
	UA	7/16-20 UNF SAE #4 J514 male	N/C	
	GB	G 1/4 B	N/C	
	HD	G 1/4 A DIN 3852-E	N/C	
	HN	M 14x1.5 DIN 3852-E	N/C	
	MV	7/16-20 UNF SAE #4 J514 male w/O-ring boss	N/C	
	??	Other - please specify	On Inquiry	
5	Case material			
	M	Fiberglass reinforced ABS plastic (PBT)	N/C	
	V	Stainless steel	\$10.97	

SPECIAL PURPOSE

Electronic Pressure > Special Purpose > MH-2

MH-2 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
6	Electrical connection		
	M4	4 Pin locking plug M12 x 1(NEMA 4/IP67)	N/C
	R3	Metri-pack series 150 3-Pin (NEMA 4/IP67)	N/C
	V4	4 Pin bayonet connector DIN 72 585 (IP69K high pressure steam protection)	N/C
	G3	Deutsch 3 Pin DT04-3P	N/C
	S3	AMP superseal 1.5 3 Pin (NEMA 4/IP67)	N/C
	FN	Cable with free ends (IP 69K high pressure steam protection)	\$25.42
	??	Other - please specify	On Inquiry
7	Cable length		
	Z	Without (always with plug version)	N/C
	A	0.5 meter (1.6 feet)	N/C
	B	2 meter (6.5 feet)	\$7.05
	G	5 meter (16.4 feet)	\$21.20
	?	Other - (2.50 per meter)	On Inquiry
8	Quality certificates		
	Z	Without	N/C
	1	Other - please specify	On Inquiry
9	Digital display		
	Z	Without	N/C
	1	Other display (order separately)	On Inquiry
10	Additional order details		
	Z	Without	N/C
	T	Additional order details	On Inquiry

Note: 50 piece minimum order quantity applies.

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10*

MH-2 - - - - **Z** -

*Additional order details

SPECIAL PURPOSE

Electronic Pressure > Special Purpose > UPT-2X (UPT-20, UPT-21)

Type UPT-20 Universal Process Transmitter



Standard features

- **Signal output:** 4-20 mA 2-wire
- **Supply voltage:** 12-36 VDC
- **Process connection:** 1/2" NPT male
- **Electrical connection:** M20 x 1.5 cable gland
- **Display:** 4½ Digit LC display
- **Accuracy:** +/- 0.15% of span

UPT-20 Part Numbers

Vacuum & Compound Ranges		
Range	Part Number	List Price
-14.5-0 psi	52595781	\$984.00
-14.5-15 psi	52595803	
-14.5-100 psi	52595811	
-14.5-300psi	52595820	

Gauge Ranges		
Range	Part Number	List Price
0-10 psi	52595838	\$907.13
0-15 psi	52595846	
0-30 psi	52595854	
0-100 psi	52571718	
0-300 psi	52595889	
0-500 psi	52595901	
0-1,500 psi	52595919	
0-5,000 psi	52595927	
0-10,000 psi	52595935	

Absolute Ranges		
Range	Part Number	List Price
0-30 psi	52595943	\$984.00
0-100 psi	52595951	
0-300 psi	52595960	
0-500 psi	52595978	

SPECIAL PURPOSE

Electronic Pressure > Special Purpose > UPT-2X (UPT-20, UPT-21)

Type UPT-2X (UPT-20, UPT-21) Universal Process Transmitter

UPT-2X Smart Codes for Custom Order Configurations			
Field no.	Code	Feature	
			Base Price \$707.25
1	Unit		Additional Price
	WTR Base UPT-2X Universal Process Transmitter		
	Process connection type		
	0	Standard connection with pressure port	N/C
2	1	Flush diaphragm connection	\$133.25
	Electrical approval		
	Z	Without	N/C
3	?	Other	On Inquiry
	Ignition protection type		
	Z	Without	N/C
4	?	Other	On Inquiry
	Zone		
	Z	Without	N/C
5	?	Other - please specify	On Inquiry
	Case Design		
	K	Fiberglass reinforced PBT	N/C
6	?	Other	On Inquiry
	Digital display		
	Z	Without	N/C
7	A	With integrated 4½ digit LCD-display	\$148.63
	Signal output		
	A	4...20 mA 2-wire	N/C
8	R	4...20 mA 2-wire with Hart protocol	\$102.50
	Electrical connection		
	A	M20x1.5 cable gland with internal terminal block	N/C
9	M	M12x1 4-pin locking plug	\$76.88
	I	DIN 43650 L plug with M20x1.5 cable gland	\$76.88
	?	Other	On Inquiry
10	Pressure unit		
	P	Psi	N/C
	?	Other	On Inquiry
10	Pressure reference		
	A	Absolute	\$76.88
	G	Gauge	N/C
	C	Compound	\$76.88

SPECIAL PURPOSE

Electronic Pressure > Special Purpose > UPT-2X (UPT-20, UPT-21)

Type UPT-2X (UPT-20, UPT-21) Universal Process Transmitter (continued)

UPT-2X Smart Codes for Custom Order Configurations

Field no. Code Feature

Base Price

Unit

Additional Price

Pressure range

310	-14.5 psi...0 psig	N/C
320	-14.5 psi...15 psig	N/C
379	-14.5 psi...100 psig	N/C
422	-14.5 psi...300 psig	N/C
269	0 psi...10 psi	N/C
310	0 psi...15 psi	N/C
321	0 psi...30 psi 0...30 psia	N/C
369	0 psi...100 psi 0...100 psia	N/C
421	0 psi...300 psi 0...300 psia	N/C
434	0 psi...500 psi 0...500 psia	N/C
510	0 psi...1,500 psi	N/C
534	0 psi...5,000 psi	N/C
569	0 psi...10,000 psi	N/C

11

???	Other	On Inquiry
-----	-------	------------

Process connection

ND	1/2" NPT male	N/C
NQ	1/2" NPT female	N/C
NB	1/4" NPT male	N/C
GD	G½ B male	N/C
85	G1B flush (only with type UPT-21 and range < 100 psi)	N/C
86	G½ B Flush (only with type UPT-21 and range ≥ 100 psi)	N/C
??	Other	On Inquiry

12

Sealing

Z	Without	N/C
4	NBR (only with flush process connections 85 or 86)	\$4.10
?	Other	On Inquiry

13

Accuracy

3	+/- 0.2% of span	N/C
2	+/- 0.15% of span	\$51.25
1	+/- 0.1% of span	\$102.50

14

Special design features

Z	Without	N/C
E	Oil and grease free	\$41.00
A	Oxygen, oil and grease free (not with absolute or compound ranges)	\$117.88
?	Other	On Inquiry

15

ELECTRONIC PRESSURE

SPECIAL PURPOSE

Electronic Pressure > Special Purpose > UPT-2X (UPT-20, UPT-21)

Type UPT-2X (UPT-20, UPT-21) Universal Process Transmitter (continued)

UPT-2X Smart Codes for Custom Order Configurations			
Field no.	Code	Feature	
16			Base Price
			Additional Price
	Certificates / approvals		
	Z	Without	N/C
	?	Other*	On Inquiry
17	Additional order details		
	Z	Without	N/C
	T	Additional text*	On Inquiry
			TOTAL PRICE

ELECTRONIC PRESSURE

UPT-2 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17*

-
 -
 -
 -
 -
 -
 -

*Additional order details _____

SPECIAL PURPOSE

Electronic Pressure > Special Purpose > HP-2

Type HP-2 Industrial Pressure Transmitter



Standard features

- **Signal output:** 4-20 mA, 0 ... 10 V, etc.
- **Supply voltage:** 10-30 VDC (14-30 VDC for 0-10V)
- **Pressure connection:** M16 x 1.5 female, M20 x 1.5 female
9/16-18 UNF female F250-C
- **Electrical connection:** DIN 175301-803 L-connector,
M12 x 1 circular connector,
flying leads, etc.

HP-2 Smart Codes for Custom Order Configurations

Field no.	Code	Feature	Base Price	Additional Price
1	Type			\$1,153.49
	S	Standard	N/C	
	D	With DIPS (Diaphragm Impact Protection System)	\$769.05	
	E	With EPS (Exchange Pressure Connection)	\$769.05	
2	Non-linearity			
	G	0.25% (B.F.S.L.)	N/C	
3	Unit			
	B	bar	\$42.46	
	P	psi	\$42.46	
	E	MPa	\$42.46	
4	Pressure reference			
	G	Relative	N/C	
5	Pressure range			
	616	0 ... 1,600 bar	N/C	
	625	0 ... 2,500 bar	N/C	
	640	0 ... 4,000 bar	\$128.38	
	650	0 ... 5,000 bar	\$770.28	
	660	0 ... 6,000 bar	\$1,411.96	
	670	0 ... 7,000 bar	contact factory	
	680	0 ... 8,000 bar	contact factory	
	710	0 ... 10,000 bar	contact factory	

SPECIAL PURPOSE

Electronic Pressure > Special Purpose > HP-2

HP-2 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
6	Pressure connection		
	ML	M16 x 1.5 female with sealing cone	N/C
	MP	M20 x 1.5 female with sealing cone	N/C
	VZ	9/16 - 18 UNF female F 250-C	On Inquiry
7	Signal output		
	A	4 ... 20 mA, 2-wire (supply: 10-30 VDC)	N/C
	F	0 ... 10 V, 3-wire (supply: 14-30 VDC)	N/C
	G	0 ... 5 V, 3-wire	N/C
8	Electrical connection		
	A4	DIN EN 175301-803 A, IP65	N/C
	M4	M12 x 1 4-pin circular connection IP67	N/C
	DL	Cable with free ends IP67	\$67.88
9	Cable length		
	Z	Without (always with plug connection)	N/C
	C	1.5 m	N/C
	?	Other	On Inquiry
10	Quality certificates		
	Z	Without	N/C
	1	Other	On Inquiry
11	Additional order details		
	Z	Without	N/C
	T	Additional order details	On Inquiry

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10 11*

HP-2 - - - - - - -

*Additional order details

SPECIAL PURPOSE

Electronic Pressure > Special Purpose > P-30

Type P-30 Precision Pressure Transmitter



P-30 Smart Codes for Custom Order Configurations

Field no.	Code	Feature	Base Price	Additional Price
				\$874.57
1		Accuracy		
	P	0.1% of span	N/C	
	R	0.05% of span	\$522.23	
2		Unit		
	P	psi	N/C	
	?	Other	On Inquiry	
3		Absolute or relative pressure		
	G	Gauge	N/C	
	A	Absolute	\$81.82	
	V	Compound	\$56.66	
4		Pressure range		
	310	-30 InHg...0	N/C	
	320	-30 InHg...+15 psi	N/C	
	331	-30 InHg...+30 psi	N/C	
	345	-30 InHg...+50 psi	N/C	
	379	-30 InHg...+100 psi	N/C	
	412	-30 InHg...+160 psi	N/C	
	415	-30 InHg...+200 psi	N/C	
	234	0...5 psig 0...5 psia	N/C	
	269	0...10 psig 0...10 psia	N/C	
	310	0...15 psig 0...15 psia	N/C	
	317	0...25 psig 0...25 psia	N/C	
	321	0...30 psig 0...30 psia	N/C	
	335	0...50 psig 0...50 psia	N/C	
	369	0...100 psig 0...100 psia	N/C	
	411	0...160 psig 0...160 psia	N/C	
	414	0...200 psig 0...200 psia	N/C	
	421	0...300 psig 0...300 psia	N/C	
	434	0...500 psig	N/C	
	469	0...1,000 psig	N/C	
	510	0...1,500 psig	N/C	
	514	0...2,000 psig	N/C	
	521	0...3,000 psig	N/C	
	534	0...5,000 psig	N/C	
	569	0...10,000 psig	N/C	
	???	Other	On Inquiry	

ELECTRONIC PRESSURE

SPECIAL PURPOSE

Electronic Pressure > Special Purpose > P-30

ELECTRONIC PRESSURE

P-30 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
5	Pressure connection		
	NB	1/4" NPT	N/C
	ND	1/2" NPT	N/C
	GD	G 1/2 B	N/C
	GB	G 1/4 B	N/C
	HD	G 1/4 A DIN 3852-E	N/C
	TB	G 1/4 female	N/C
	T4	G 1/2 male / G 1/4 female	N/C
	??	Other	On Inquiry
6	Sealing		
	Z	Without (not required for NB, ND, TB or T4)	N/C
	1	NBR (only for HD)	N/C
	C	Copper (only for GD, GB)	N/C
	S	Stainless steel (only for GD, GB)	\$8.07
	?	Other	On Inquiry
7	Special design for media		
	Z	None	N/C
	?	Other	On Inquiry
8	Signal output		
	A	4 ... 20 mA, 2-wire (supply: 9-30 VDC)	N/C
	B	0 ... 20 mA, 3-wire	N/C
	F	0 ... 10 V, 3-wire (supply: 14-30 VDC)	N/C
	G	0 ... 5 V, 3-wire	N/C
	V	4 ... 20 mA, 3-wire	N/C
	2	USB 2.0 (supply: 5 VDC +/- 10%)	\$153.75
	9	CANopen per CiA; protocol DS	\$153.75
9	Electrical connection		
	M4	4 circular connector M12x1, 4 pin	N/C
	B5	Plug, M16 x 0.75, 5 pin	N/C
	C6	Bayonet connector, 6 pin PT02E-10-6P	N/C
	A4	4 pin L-plug DIN EN 175301-803, IP65	N/C
	DL	Cable with free ends, IP 67	\$81.82
10	Cable length		
	Z	Without	N/C
	6	6 ft (only with DL)	N/C
	7	15 ft (only with DL)	\$18.85
	?	Other	On Inquiry
11	Additional order info		
	YES	NO	
	1	Z	Quality certificates
12	T	Z	Additional text

Easy Com software with cable: Part #13193075 - \$143.17

Order Code: 1 2 3 4 5 6 7 8 9 10 11 12

P-30 - - - - - -

*Additional order details _____

SPECIAL PURPOSE

Electronic Pressure > Special Purpose > P-31

Type P-31 Precision Pressure Transmitter w/Non-clogging Flush Diaphragm



P-31 Smart Codes for Custom Order Configurations

Field no.	Code	Feature	Base Price	Additional Price
				\$924.93
1		Accuracy		
	P	0.1% of span	N/C	
	R	0.05% of span	\$522.11	
2		Unit		
	P	psi	N/C	
	?	Other	On Inquiry	
3		Absolute or relative pressure		
	G	Gauge	N/C	
	A	Absolute	\$81.82	
	V	Compound	\$56.66	
4		Pressure range		
	310	-30 InHg...0	N/C	
	320	-30 InHg...+15 psi	N/C	
	331	-30 InHg...+30 psi	N/C	
	345	-30 InHg...+50 psi	N/C	
	379	-30 InHg...+100 psi	N/C	
	412	-30 InHg...+160 psi	N/C	
	415	-30 InHg...+200 psi	N/C	
	234	0...5 psig 0...5 psia	N/C	
	269	0...10 psig 0...10 psia	N/C	
	310	0...15 psig 0...15 psia	N/C	
	317	0...25 psig 0...25 psia	N/C	
	321	0...30 psig 0...30 psia	N/C	
	335	0...50 psig 0...50 psia	N/C	
	369	0...100 psig 0...100 psia	N/C	
	411	0...160 psig 0...160 psia	N/C	
	414	0...200 psig 0...200 psia	N/C	
	421	0...300 psig	N/C	
	434	0...500 psig	N/C	
	469	0...1,000 psig	N/C	
	510	0...1,500 psig	N/C	
	514	0...2,000 psig	N/C	
	521	0...3,000 psig	N/C	
	534	0...5,000 psig	N/C	
	???	Other	On Inquiry	

ELECTRONIC PRESSURE

SPECIAL PURPOSE

Electronic Pressure > Special Purpose > P-31

P-31 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
5	Pressure connection		
	85	G1B flush diaphragm w/O-ring (up to 25 psi)	N/C
	86	G1/2B flush diaphragm w/O-ring (> 30 psi)	N/C
6	Sealing		
	1	NBR	N/C
	B	EPDM	N/C
	L	FPM/FKM	N/C
	?	Other	On Inquiry
7	Special design for media		
	Z	None	N/C
	?	Other	On Inquiry
8	Signal output		
	A	4 ... 20 mA, 2-wire (supply: 9- 30 VDC)	N/C
	B	0 ... 20 mA, 3-wire	N/C
	F	0 ... 10 V, 3-wire (supply: 14- 30 VDC)	N/C
	G	0 ... 5 V, 3-wire	N/C
	V	4 ... 20 mA, 3-wire	N/C
	2	USB 2.0 (supply: 5 VDC +/- 10%)	\$153.75
	9	CANopen per CiA; protocol DS	\$153.75
9	Electrical connection		
	M	4 circular connector M12x1, 4 pin	N/C
	B5	Plug, M16 x 0.75, 5 pin	N/C
	C6	Bayonet connector, 6 pin PT02E-10-6P	N/C
	A4	4 pin L-plug DIN EN 175301-803, IP65	N/C
	DL	Cable with free ends, IP 67	\$81.82
10	Cable length		
	Z	Without	N/C
	6	6 ft (only with DL)	N/C
	7	15 ft (only with DL)	\$18.85
	?	Other	On Inquiry
11	Additional order info		
	YES	NO	
	1	Z	Quality certificates
12	T	Z	Additional text

Easy Com software with cable: Part #13193075 - \$143.17

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10 11 12
P-31- - - - - -

*Additional order details

SPECIAL PURPOSE

Electronic Pressure > Special Purpose > R-1

Type R-1 Refrigeration & AC Transmitter

Standard features

- All stainless steel construction
- Welded case-to-socket connection



Note: 50 piece minimum order quantity applies.

R-1 Smart Codes for Custom Order Configurations

Field no.	Code	Feature	Base Price	Additional Price	
					\$128.70
1	Accuracy				
	A	($\leq$) 1.0% (B.F.S.L)	N/C		
2	Unit				
	P	psi	N/C		
	B	bar	N/C		
	?	Other - please specify	On Inquiry		
3	Reference				
	G	Gauge	N/C		
	V	Compound	N/C		
4	Pressure range				
	379	-30 InHg...+100 psi	N/C		
	415	-30 InHg...+200 psi	N/C		
	422	-30 InHg...+300 psi	N/C		
	442	-30 InHg...+600 psi	N/C		
	369	0...100 psi	N/C		
	410	0...150 psi	N/C		
	414	0...200 psi	N/C		
	421	0...300 psi	N/C		
	441	0...600 psi	N/C		
	459	0...850 psi	N/C		
	411	-1...+10 bar	N/C		
	426	-1...+25 bar	N/C		
	360	0...6 bar	N/C		
	410	0...10 bar	N/C		
	416	0...16 bar	N/C		
	425	0...25 bar	N/C		
	440	0...40 bar	N/C		
	460	0...60 bar	N/C		
	???	Other	On Inquiry		

SPECIAL PURPOSE

Electronic Pressure > Special Purpose > R-1

R-1 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
5	Process connection		
	NH	1/8" NPT	N/C
	NB	1/4" NPT	N/C
	U5	7/16-20UNF-2A 90° Cone	N/C
	U6	7/16-20UNF-2B Schrader	N/C
	HA	G 1/4 B EN 837	N/C
	?	Other	On Inquiry
6	Signal output		
	W	0.5-4.5V 3-wire ratiometric	N/C
	A	4-20mA 2-wire	N/C
	K	1-5V 3-wire	N/C
	F	0-10V 3-wire	N/C
7	Supply voltage		
	E	5 V DC +/- 10% (only with signal output W)	N/C
	G	7...30 V DC (only with signal output A)	N/C
	C	14...30 V DC (only with signal output F)	N/C
8	Electrical connection		
	R3	Metri pack series 150 3 pin connector (NEMA 4 / IP 67)	N/C
	M4	4 Pin locking plug M12 x 1 (NEMA 4 / IP 67)	N/C
	FN	Cable with free ends (NEMA 4 / IP 69K high pressure steam protection)	\$15.11
9	Cable length		
	A	0.5 m (1.6 feet)	N/C
	H	1 m (3.28 feet)	\$2.51
	B	2 m (6.5 feet)	\$5.02
	G	5 m (16.4 feet)	\$10.03
	Z	Without (always with electrical connection R3 or M4)	N/C
	?	Other	On Inquiry
10	Approvals		
	Z	Without	N/C
	R	c RU us	On Inquiry
11	Additional order details		
	Z	Without	N/C
	T	Additional text	On Inquiry

Note: 50 piece minimum order quantity applies.

TOTAL PRICE

Order
Code:

1 2 3 4 5 6 7 8 9 10 11
R-1 - - - - -

Additional order details

SPECIAL PURPOSE

Electronic Pressure > Special Purpose > AC-1

Type AC-1 Air Conditioning and Refrigeration Pressure Transmitter



AC-1 with M12X1

Note: 50 piece minimum order quantity applies.

ELECTRONIC PRESSURE

AC-1 Smart Codes for Custom Order Configurations				
Field no.	Code	Feature	Base Price	\$109.48
			Additional Price	
1	Accuracy			
	A	($\leq$) 1.0% (B.F.S.L)	N/C	
2	Unit			
	P	psi	N/C	
	B	bar	N/C	
	?	Other - please specify	On Inquiry	
3	Reference			
	G	Gauge	N/C	
	V	Compound	N/C	
4	Pressure range			
	379	-30 InHg...+100 psi	N/C	
	415	-30 InHg...+200 psi	N/C	
	422	-30 InHg...+300 psi	N/C	
	442	-30 InHg...+600 psi	N/C	
	369	0...100 psi	N/C	
	410	0...150 psi	N/C	
	414	0...200 psi	N/C	
	421	0...300 psi	N/C	
	441	0...600 psi	N/C	
	459	0...850 psi	N/C	
	411	-1...+10 bar	N/C	
	426	-1...+25 bar	N/C	
	360	0...6 bar	N/C	
	410	0...10 bar	N/C	
	416	0...16 bar	N/C	
	425	0...25 bar	N/C	
	440	0...40 bar	N/C	
	460	0...60 bar	N/C	
	???	Other	On Inquiry	
5	Process connection			
	NH	1/8" NPT	N/C	
	NB	1/4" NPT	N/C	
	U5	7/16-20UNF-2A 90° Cone	N/C	
	U6	7/16-20UNF-2B Schrader	N/C	
	HA	G 1/4 B EN 837	N/C	
	??	Other	On Inquiry	

SPECIAL PURPOSE

Electronic Pressure > Special Purpose > AC-1

AC-1 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
6		Sensor seal material	
	C	CR70 (polychlororene)	N/C
	?	Other	On Inquiry
7		Signal output	
	W	0.5-4.5V 3-wire ratiometric	N/C
	A	4-20mA 2-wire	N/C
	F	0-10V 3-wire	N/C
	?	Other	On Inquiry
8		Supply voltage	
	E	5 V DC +/- 10% (only with signal output W)	N/C
	G	7...30 V DC (only with signal output A)	N/C
	C	14...30 V DC (only with signal output F)	N/C
9		Electrical connection	
	R3	Metri pack series 150 3 pin connector (NEMA 4 / IP 67)	N/C
	M4	4 Pin locking plug M12 x 1 (NEMA 4 / IP 67)	N/C
	FN	Cable with free ends (NEMA 4 / IP 69K high pressure steam protection)	\$15.01
10		Cable length	
	A	0.5 m (1.6 feet)	N/C
	H	1 m (3.28 feet)	\$2.51
	B	2 m (6.5 feet)	\$5.02
	G	5 m (16.4 feet)	\$10.03
	Z	Without (always with electrical connection R3 or M4)	N/C
	?	Other	On Inquiry
11		Approvals	
	Z	Without	N/C
	R	c RU us	On Inquiry
12		Additional order details	
	Z	Without	N/C
	T	Additional text	On Inquiry

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10 11 12
AC-1 - - - - -

Additional order details

Type TTF-1 Pressure Transmitters with Thin Film Sensor

The Type TTF-1 is designed for engineers who want to provide their own power supply and signal conditioning circuitry. The sensors are manufactured by depositing an insulating layer onto a 17-4PH stainless steel or Elgiloy diaphragm, then depositing a metal strain gauge element by vacuum deposition, resulting in high stability, ruggedness and extended operating life. For improved performance, temperature compensating elements, wiring and balance components are deposited simultaneously during the manufacturing process.



Contact WIKA for pricing on the TTF-1
Minimum order quantities apply

Type A-AI-1 Attachable Digital Indicator

Standard features

- Attachable loop powered digital indicator
- Fits Type S-10, S-11 and A-10 transmitters with full size Din plug
- User-programmable 0.4" LCD display



A-AI-1 Meters			
Type	Part #	Description	List price
A-AI-1	7082534	Loop powered indicator for S-10, S-11 and A-10 using DIN 43 650 electrical connector (4-20 mA 2-wire only)	\$295.74

NOTE: Standard items shown in **bold print**. (Subject to prior sale)

Type DI-15 Digital Meter

Standard features

- Compact panel mount digital indicator
- Dual solid state relays and RS 485 serial interface
- User-programmable



DI-15 Meters			
Type	Part #	Description	List price
DI-15	7464880	Digital indicator with 2 solid state relays for panel mounting, accepts 4-20mA, 0-20mA, 01V, 0-10V, Pt1000 signal inputs.)	\$295.48

NOTE: Standard items shown in **bold print**. (Subject to prior sale)

Type S-10-3A Sanitary Pressure Transmitters

Standard features

- 3A sanitary pressure transmitter
- Available with an integral cooling extension for high temperature applications (Type S-10-3A.C)



S-10-3A



S-10-3A.C



S-10-3A Part Numbers

Pressure conn.	1½" or 2" Tri-Clamp®	
Power supply	10-30 VDC	
Signal output	4 - 20 mA 2-wire	
Electrical conn.	DIN 43 650 with plug connector	
Vacuum and compound ranges	Part Numbers	
List price	\$842.80	
Vacuum and compound ranges	Part Numbers	
	1½" Tri-Clamp®	2" Tri-Clamp®
0 - 100 inWC	52168166	52496171
0 - 150 inWC		
0 - 250 inWC		
0 - 400 inWC		
Gauges	Part Numbers	
List price	\$755.22	
0-15 psi	9748202	9748210
0-30 psi	9748075	4225007
0-50 psi	4215789	4215771
0-60 psi	9744703	9748199
0-100 psi	9748237	9747931
0-160 psi	9748245	9748253
0-200 psi	9749408	4213246
0-250 psi	9776227	4268831
0-300 psi	8990985	4253877
0-500 psi	50961667	9745828
0-1,000 psi	8993470	4281737

Electrical connector options

Description	Part Number	List price
DIN 43 650 PG-9 plug (std)	1006711	\$6.80
DIN 43 650 ½" female conduit	1632159	\$6.80
Attachable LCD display	7082534	\$295.48
5 foot cable IP 67 / NEMA 4	9744479	\$70.73
10 foot cable IP 67 / NEMA 4	9838915	\$74.55
20 foot cable IP 67 / NEMA 4	4239904	\$100.23
30 foot cable IP 67 / NEMA 4	4239921	\$125.92
50 foot cable IP 67 / NEMA 4	4293348	\$177.35
4 pin MIL plug PT02E-8-4P	2184479	\$95.77
6 pin MIL plug PT02E-10-6P	9744460	\$95.77

Special order options

Output signals	List price
0-20 mA 3-wire	\$95.77
0-5 V 3-wire	\$95.77
0-10 V 3-wire	\$95.77
Other	On Inquiry
Process connections	List price
Integral cooling extension for media temp. up to +350°F (177°C) (Type number changes to S-10.3A.C)	\$125.02
3" Tri-Clamp® connection	On Inquiry
4" Tri-Clamp® connection	
Cherry Burrell® I-Line	
INLINE Seal	
Other	
Other options	List price
Electropolished diaphragm to ≤15 Ra	\$58.79
NEOBEE® M-20 liquid fill	\$55.91
Food grade silicone liquid fill	\$55.91
Non-standard pressure range	On Inquiry
NIST traceable calibration certificate <0.50% B.F.S.L. (part # 502)	\$81.03
Teflon® coated diaphragm	On Inquiry
Hastelloy® wetted parts	On Inquiry

NOTE: Stock items shown in **bold print**.

Items shown with part numbers are available from stock (subject to prior sale). Items without part numbers are available on special order.

Type SA-11 Sanitary Pressure Transmitters

Standard features

- Low pressure 3A sanitary pressure transmitter
- Available with 1.5" or 2" Tri-Clamp® connections
- Designed for media temperature to 150°C (300°F)



SA-11



Type SA-11 with IP 68 cable washdown option

ELECTRONIC PRESSURE

SA-11 Part Numbers		
Pressure connection	1½" or 2" Tri-Clamp®	
Power supply	10-30 VDC	
Signal output	4 -20 mA 2-wire	
Electrical connection	DIN 43 650 with plug connector	
List price	\$742.24	
Gauge Ranges	Part number	
	1½" Tri-Clamp®	2" Tri-Clamp®
0 - 100 inWC	4361853	4361861
0 - 150 inWC		4373576
0 - 250 inWC	4361887	4361879
0 - 400 inWC		50362305
0 - 25 psi		4209986
0 - 50 psi	4200104	4200113
0 - 100 psi	4394866	50006495

NOTE: Standard items shown in **bold print**. (Subject to prior sale)

Items shown with part numbers are available from stock (subject to prior sale). Items without part numbers are available on special order.

3A SANITARY

Electronic Pressure > 3A Sanitary > SA-11

ELECTRONIC PRESSURE

SA-11 Smart Codes for Custom Order Configurations				
Field no.	Code	Feature	Base Price	\$742.24
			Additional Price	
1	Signal output			
	A	4 ... 20 mA, 2-wire	N/C	
	B	0 ... 20 mA, 3-wire	\$91.90	
	F	0 ... 10 V, 3-wire	\$91.90	
	G	0 ... 5 V, 3-wire	\$91.90	
	?	Customer specification	\$91.90	
2	Unit			
	P	psi	N/C	
	3	psi absolute	On Inquiry	
	N	InWC	N/C	
	?	Customer specification	On Inquiry	
3	Pressure range			
	PCA	-30/0 inHg	On Inquiry	
	PCN	0/5 psi	\$106.06	
	PCP	0/10 psi	On Inquiry	
	PBD	0/30 psi	On Inquiry	
	PBE	0/60 psi	On Inquiry	
	PBF	0/100 psi 0...100 psia	N/C	
	PBG	0/160 psi	On Inquiry	
	PBH	0/200 psi	On Inquiry	
	PBI	0/300 psi	On Inquiry	
	???	Customer specification	N/C	
	NGU	0/100 InWC	N/C	
	NGV	0/150 InWC	N/C	
	NGW	0/250 InWC	On Inquiry	
	NGX	0/400 InWC	On Inquiry	
4	Process connection			
	RT	Tri-Clamp® DN 1-1/2"	N/C	
	SA	Tri-Clamp® DN 2"	N/C	
	??	Customer specification	On Inquiry	
5	Sealing			
	A	Without	N/C	
	?	Customer specification	On Inquiry	
6	Accuracy			
	G	+/- 0.25% B.F.S.L.	N/C	
	K	+/- 0.125% B.F.S.L.	\$126.51	
7	Electrical connection			
	A4	4 Pin L-plug DIN EN 175301-803 with PG 9 (NEMA 5 / IP 65)	\$6.80	
	M4	4 Pin locking plug M12 x 1 (NEMA 4 / IP 67)	N/C	
	EM	Vented cable with free ends (NEMA 6 / IP 68)	On Inquiry	
	??	Customer specification	On Inquiry	

3A SANITARY

Electronic Pressure > 3A Sanitary > SA-11

SA-11 Smart Codes for Custom Order Configurations continued			
Field no.	Code	Feature	Additional Price
8	Cable length		
	Z	Without	N/C
	Y	5 feet	N/C
	1	10 feet	\$12.87
	2	20 feet	\$38.56
	3	30 feet	\$64.25
	?	Customer specification	\$12.87
9	Approvals		
	Z	Without	N/C
	?	Customer specification	On Inquiry
10	Quality certificates		
	Z	Without	N/C
	1	Quality certificates	N/C
11	Digital display		
	Z	Without	N/C
	1	Digital display	\$268.61
12	Additional order details		
	Z	Without	N/C
	T	Additional text	N/C

ELECTRONIC PRESSURE

TOTAL PRICE

Order Code: 1 2 3 4 5 6 7 8 9 10 11 12
SA-11 - - - - -

Additional order details

Type F-20-3A Sanitary Pressure Assembly

Standard features

- 3A sanitary pressure assembly
- FDA approved system fill
- All-welded design



3/4" connection



Standard 1.5" connection

F-20-3A Part Numbers

Pressure connection	3/4" Tri-Clamp®	1½" Tri-Clamp®	2" Tri-Clamp®
Power supply	10-30 VDC		
Signal output	4 -20 mA 2-wire		
List price	\$862.61	\$833.78	\$837.94
Ranges	Part number		
0 - 15 psi	n/a	50236407	50236512
0 - 25 psi	n/a	50236415	50236521
0 - 30 psi	n/a	50236423	50236539
0 - 50 psi	n/a	50236431	50236547
0 - 60 psi	50236334	50236440	50236555
0 - 100 psi	50236351	50236458	50236563
0 - 160 psi	50236369	50236466	50236571
0 - 200 psi	50236377	50236474	50236580
0 - 300 psi	---	---	---
0 - 500 psi	---	---	---
0 - 1,000 psi	---	---	---
List price	\$912.49	\$925.63	\$929.85
Vacuum and compound ranges	Part number		
-30"Hg Vac	n/a	50236482	50236598
-30"Hg - 30 psi	n/a	50236491	50236601
-30"Hg - 60 psi	50236393	50236504	50236610
-30"Hg - 100 psi	---	---	---
-30"Hg - 200 psi	---	---	---

NOTES:

Items shown with part numbers are available from stock (subject to prior sale).

Items without part numbers are available on special order.

3A SANITARY

Electronic Pressure > 3A Sanitary > F-20-3A

F-20-3A Smart Codes for Custom Order Configurations			
Field no.	Code	Feature	
1			Base Price
			\$833.78
			Additional Price
	Signal output		
		4 ... 20 mA, 2-wire	N/C
		0 ... 10 V, 3-wire (Supply 14-30 V)	\$79.39
2		0 ... 5 V, 3-wire	\$79.39
		Other - please specify	On Inquiry
	Units		
		psi	N/C
3		InWC	N/C
		Other - please specify	On Inquiry
3	Pressure range		
		-30 inHg ... 0 ¹	\$91.90
		-30 inHg ... 30 psi ¹	\$91.90
		-30 inHg ... 60 psi	\$91.90
		-30 inHg ... 100 psi	\$91.90
		-30 inHg ... 160 psi	\$91.90
		-30 inHg ... 200 psi	\$91.90
		0 InWC ... 50 InWC ^{1,2}	N/C
		0 InWC ... 100 InWC ^{1,2}	N/C
		0 psi ... 5 psi ^{1,2}	N/C
		0 psi ... 10 psi ^{1,2}	N/C
		0 psi ... 15 psi ¹	N/C
		0 psi ... 30 psi ¹	N/C
		0 psi ... 60 psi	N/C
		0 psi ... 100 psi	N/C
		0 psi ... 160 psi	N/C
		0 psi ... 200 psi	N/C
		0 psi ... 300 psi	N/C
		0 psi ... 400 psi	N/C
		0 psi ... 500 psi	N/C
		0 psi ... 600 psi	N/C
		0 psi ... 750 psi	N/C
		0 psi ... 1,000 psi	N/C
		0 psi ... 1,500 psi	N/C
4	Process connection		
		¾" Tri-Clamp®	\$28.83
		1½" Tri-Clamp®	N/C
		2.0" Tri-Clamp®	\$4.22
		2½" Tri-Clamp®	\$61.89
		3.0" Tri-Clamp®	\$78.29
		4.0" Tri-Clamp®	\$98.90
		Other - please specify	On Inquiry

3A SANITARY

Electronic Pressure > 3A Sanitary > F-20-3A

ELECTRONIC PRESSURE

F-20-3A Smart Codes for Custom Order Configurations continued

Field no.	Code	Feature	Additional Price
5	Material of wetted parts		
		316L SS (1.4435) electropolished	N/C
		Hastelloy® C276 (2.4819)	On Inquiry
		PFA coated 316L SS (FDA approved)	On Inquiry
		Other - please specify	On Inquiry
6	System Fill fluid		
		KN 7 - Glycerine ^{3, 4}	N/C
		KN 93 - Food grade silicone oil ³	\$51.91
		KN 59 - NEOBEE® M20	\$51.91
		KN 92 - Mineral oil (liquid paraffin)	N/C
		Other - please specify	On Inquiry
7	Electrical connection		
		½" NPT female conduit (IP 67)	N/C
		Stainless steel cable gland (IP 68)	\$42.46
		Other - please specify	On Inquiry
8	Quality certificates		
		Without	N/C
		Certificate - electropolish w/ nominal surface finish	\$68.68
		Certificate - EN 10 204 3.1 (material traceable)	\$68.68
		Certificate of Compliance (C of C)	N/C
		Certificate - NIST calibration	\$77.76
		Other - please specify	On Inquiry
9	Additional order detail		
		Without	N/C
		Additional text	On Inquiry

Notes:

- 1) Not available with ¾" Tri-Clamp® process connection
- 2) Consult WIKA for suitable process connection size
- 3) Not recommended for vacuum or compound pressure ranges
- 4) Standard offering for ¾" Tri-Clamp® with positive pressure ranges

TOTAL PRICE

Miscellaneous Parts List

Part #	Description	Used with model numbers	List price
316 SS Adapters			
1400452	G1/2 to 1/2NPT male flush to NPT adapter	All with G1/2B flush diaphragm	\$35.35
2252651	G1/2 to 1/2NPT male flush to NPT adapter .45" bore	All with G1/2B flush diaphragm	\$35.35
2252694	G1 to 1/2NPT male flush to NPT adapter .45" bore	All with G1B flush diaphragm	\$91.90
1400460	G1/2 to 1/4NPT male flush to NPT adapter	All with G1/2B flush diaphragm	\$35.35
1206974	P-1 G1 weld insert adapter	All with G1B flush diaphragm	\$63.65
1097008	P-1 G1/2 weld insert adapter	All with G1/2B flush diaphragm	\$63.65
1128302	1/2NPT female to 1/4 NPT male adapter	All 1/2 NPT male transmitters	\$36.00
2250462	P-3 Victaulic adapter for G1B	All with G1B flush diaphragm	\$91.90
O-rings and gaskets			
1108247	Buna N - G1B O-ring	All with G1B flush diaphragm	\$3.58
1100386	Buna N - G1B Gasket	All with G1B flush diaphragm	\$3.58
0478164	Buna N - G1/2B O-ring	All with G1/2B flush diaphragm	\$3.58
1039067	Buna N - G1/2B Gasket	All with G1/2B flush diaphragm	\$3.58
1099094	Viton® G1B O-ring	All with G1B flush diaphragm	\$7.74
1145967	Viton® G1B Gasket	All with G1B flush diaphragm	\$7.74
1158295	Viton® G1/2B O-ring	All with G1/2B flush diaphragm	\$7.74
1039075	Viton® G1/2B Gasket	All with G1/2B flush diaphragm	\$7.74
Electrical connectors			
1006711	DIN 43650 standard replacement connector PG	All S and IS series	\$6.80
1632159	DIN 43650 1/2" female conduit connector	S-1X, IS-2X	\$6.80
9734821	DIN 43650 with molded 6 foot (2 meter) cable	S-1X, IS-2X	\$49.51
9735882	Mini DIN standard replacement connector	C-10, others with MiniDIN connection	\$7.05
9740010	Mini DIN with molded 6 foot (2 meter) cable	C-10, others with MiniDIN connection	\$37.55
2055816	6 foot (2 m) cable with 5 pin M12x1 female plug	All with M12x1 5 pin male connections	\$25.42
11250798	6 foot (2m) cable with 4 pin angled M12X1 female plug	All with M12x1 4 pin connector	\$28.63
11250780	6 foot (2m) cable with 4 pin straight M12X1 female plug	All with M12x1 4 pin connector	\$28.63
11250232	15 foot (4.5m) cable with 4 pin angled M12X1 female plug	All with M12x1 4 pin connector	\$46.95
11250259	15 foot (4.5m) cable with 4 pin straight M12X1 female plug	All with M12x1 4 pin connector	\$46.95
11225793	6 foot (2m) cable with form A (Full Size DIN) female plug	A-10, S-1X, IS-2X with male connection	\$40.06
11250186	15 foot (4.5m) cable with form A (Full Size DIN) female plug	A-10, S-1X, IS-2X with male connection	\$58.37
11225823	6 foot (2m) cable with form C (miniDIN) female plug	A-10 only	\$40.06
11250194	15 foot (4.5m) cable with form C (miniDIN) female plug	A-10 only	\$58.37

MISCELLANEOUS

Electronic Pressure > Miscellaneous > Accessories & Replacement Parts List

Miscellaneous Parts List continued

Part #	Description	Used with model numbers	List price
Submersible transmitter accessories			
9836700	Vent tube desiccant drying cartridge	LS-10, LH-10, IL-10	\$19.81
50600770	VentGuard® cable protection kit	LS-10, LH-10, IL-10	\$175.00
14052344	Vent tube filter	LS-10, LH-10, IL-10	\$26.80
2074257	Cable clamp	LS-10, LH-10, IL-10	\$29.69
2459686	Cable junction box	LS-10, LH-10, IL-10	\$106.06
1524399	Additional weight	LS-10, LH-10, IL-10	\$95.77
50077091	LevelGuard attachment *	LS-10, LH-10, IL-10	\$558.43
50476114	1/2NPT cable conduit adapter *	LS-10, LH-10	\$35.35
1631322	G1/2 - Male 1/2NPT - 1/4NPT female adaptor	LS-10, LH-10, IL-10	\$35.35
Other miscellaneous accessories			
11449978	Restrictor screw installed *	for 1/2" or 1/4"NPT, SAE male	\$7.05
502	NIST Certificate 0.25% *	S-10, S-11, others	\$77.76
9795885	4-20 mA to 1-5V output signal conversion *	S-10, S-11	\$42.46
504	NIST Certificate 0.125% *	S-10, S-11	\$113.11
4200767	NIST Certificate 0.05% *	P-30, P-31	\$176.76

* Factory installed items cannot be user installed

REFERENCES

References > Conversion Chart

How to convert from °Celsius to °Fahrenheit, or °Fahrenheit to °Celsius

Locate the known temperature (either Fahrenheit or Celsius) in the center shaded column.

Read left to convert from Celsius to Fahrenheit,
or right to convert from Fahrenheit to Celsius.

To °F	From	To °C	To °F	From	To °C	To °F	From	To °C	To °F	From	To °C	To °F	From	To °C	To °F	From	To °C
-148	-100	-73.33	75.2	24	-4.51	298.4	148	64.31	521.6	272	133.13	744.8	396	201.95	968	520	271.11
-144.4	-98	-72.22	78.8	26	-3.4	302	150	65.42	525.2	274	134.24	748.4	398	203.06	971.6	522	272.22
-140.8	-96	-71.11	82.4	28	-2.29	305.6	152	66.53	528.8	276	135.35	752	400	204.17	975.2	524	273.33
-137.2	-94	-70	86	30	-1.18	309.2	154	67.64	532.4	278	136.46	755.6	402	205.28	978.8	526	274.44
-133.6	-92	-68.89	89.6	32	-0.07	312.8	156	68.75	536	280	137.57	759.2	404	206.39	982.4	528	275.56
-130	-90	-67.78	93.2	34	1.04	316.4	158	69.86	539.6	282	138.68	762.8	406	207.5	986	530	276.67
-126.4	-88	-66.67	96.8	36	2.15	320	160	70.97	543.2	284	139.79	766.4	408	208.61	989.6	532	277.78
-122.8	-86	-65.56	100.4	38	3.26	323.6	162	72.08	546.8	286	140.9	770	410	209.72	993.2	534	278.89
-119.2	-84	-64.45	104	40	4.37	327.2	164	73.19	550.4	288	142.01	773.6	412	210.83	996.8	536	280
-115.6	-82	-63.34	107.6	42	5.48	330.8	166	74.3	554	290	143.12	777.2	414	211.94	1000.4	538	281.11
-112	-80	-62.23	111.2	44	6.59	334.4	168	75.41	557.6	292	144.23	780.8	416	213.05	1004	540	282.22
-108.4	-78	-61.12	114.8	46	7.7	338	170	76.52	561.2	294	145.34	784.4	418	214.16	1007.6	542	283.33
-104.8	-76	-60.01	118.4	48	8.81	341.6	172	77.63	564.8	296	146.45	788	420	215.27	1011.2	544	284.44
-101.2	-74	-58.9	122	50	9.92	345.2	174	78.74	568.4	298	147.56	791.6	422	216.38	1014.8	546	285.56
-97.6	-72	-57.79	125.6	52	11.03	348.8	176	79.85	572	300	148.67	795.2	424	217.49	1018.4	548	286.67
-94	-70	-56.68	129.2	54	12.14	352.4	178	80.96	575.6	302	149.78	798.8	426	218.6	1022	550	287.78
-90.4	-68	-55.57	132.8	56	13.25	356	180	82.07	579.2	304	150.89	802.4	428	219.71	1040	560	293.33
-86.8	-66	-54.46	136.4	58	14.36	359.6	182	83.18	585.8	306	152	806	430	220.82	1058	570	298.89
-83.2	-64	-53.35	140	60	15.47	363.2	184	84.29	586.4	308	153.11	809.6	432	221.93	1076	580	304.44
-79.6	-62	-52.24	143.6	62	16.58	366.8	186	85.4	590	310	154.22	813.2	434	223.04	1094	590	310
-76	-60	-51.13	147.2	64	17.69	370.4	188	86.51	593.6	312	155.33	816.8	436	224.15	1112	600	315.66
-72.4	-58	-50.02	150.8	66	18.8	374	190	87.62	597.2	314	156.44	820.4	438	225.26	1130	610	321.11
-68.8	-56	-48.91	154.4	68	19.91	377.6	192	88.73	600.8	316	157.55	824	440	226.37	1148	620	326.22
-65.2	-54	-47.8	158	70	21.02	381.2	194	89.84	604.4	318	158.66	827.6	442	227.48	1166	630	332.22
-61.6	-52	-46.69	161.6	72	22.13	384.8	196	90.95	608	320	159.77	831.2	444	228.59	1184	640	337.78
-58	-50	-45.58	165.2	74	23.24	388.4	198	92.06	611.6	322	160.88	834.8	446	229.7	1202	650	343.33
-54.4	-48	-44.47	168.8	76	24.35	392	200	93.17	615.2	324	161.99	838.4	448	230.81	1220	660	348.89
-50.8	-46	-43.36	172.4	78	25.46	395.6	202	94.28	618.8	326	163.1	842	450	231.92	1238	670	354.44
-47.2	-44	-42.25	176	80	26.57	399.2	204	95.39	622.4	328	164.21	845.6	452	233.03	1256	680	360
-43.6	-42	-41.14	179.6	82	27.68	402.8	206	96.5	626	330	165.32	849.2	454	234.14	1274	690	365.56
-40	-40	-40.03	183.2	84	28.79	406.4	208	97.61	629.6	332	166.43	852.8	456	235.25	1292	700	371.11
-36.4	-38	-38.92	186.8	86	29.9	410	210	98.72	633.2	334	167.54	856.4	458	236.36	1310	710	376.67
-32.8	-36	-37.81	190.4	88	31.01	413.6	212	99.83	636.8	336	168.65	860	460	237.47	1328	720	382.22
-29.2	-34	-36.7	194	90	32.12	417.2	214	100.94	640.4	338	169.76	863.6	462	238.58	1346	730	387.78
-25.6	-32	-35.59	197.6	92	33.23	420.8	216	102.05	644	340	170.87	867.2	464	240	1364	740	393.33
-22	-30	-34.48	201.2	94	34.34	424.4	218	103.16	647.6	342	171.98	870.8	466	241.11	1382	750	398.89
-18.4	-28	-33.37	204.8	96	35.45	428	220	104.27	651.2	344	173.09	874.4	468	242.22	1400	760	404.44
-14.8	-26	-32.26	208.4	98	36.56	431.6	222	105.38	654.8	346	174.2	878	470	243.33	1418	770	410
-11.2	-24	-31.15	212	100	37.67	435.2	224	106.49	658.4	348	175.31	881.6	472	244.44	1436	780	415.56
-7.6	-22	-30.04	215.6	102	38.78	438.8	226	107.6	662	350	176.42	885.2	474	245.55	1454	790	421.11
-4	-20	-28.93	219.2	104	39.89	442.4	228	108.71	665.6	352	177.53	888.8	476	246.66	1472	800	426.67
-0.4	-18	-27.82	222.8	106	41	446	230	109.82	669.2	354	178.64	892.4	478	247.77	1490	810	432.22
3.2	-16	-26.71	226.4	108	42.11	449.6	232	110.93	672.8	356	179.75	896	480	248.88	1508	820	437.78
6.8	-14	-25.6	230	110	43.22	453.2	234	112.04	676.4	358	180.86	899.6	482	250	1526	830	443.33
10.4	-12	-24.49	233.6	112	44.33	456.8	236	113.15	680	360	181.97	903.2	484	251.11	1544	840	448.89
14	-10	-23.38	237.2	114	45.44	460.4	238	114.26	683.6	362	183.08	906.8	486	252.22	1562	850	454.44
17.6	-8	-22.27	240.8	116	46.55	464	240	115.37	687.2	364	184.19	910.4	488	253.33	1580	860	460
21.2	-6	-21.16	244.4	118	47.66	467.6	242	116.48	690.8	366	185.3	914	490	254.44	1598	870	465.56
24.8	-4	-20.05	248	120	48.77	471.2	244	117.59	694.4	368	186.41	917.6	492	255.55	1616	880	471.11
28.4	-2	-18.94	251.6	122	49.88	474.8	246	118.7	698	370	187.52	921.2	494	256.66	1634	890	476.67
32	0	-17.83	255.2	124	50.99	478.4	248	119.81	701.6	372	188.63	924.8	496	257.77	1652	900	482.22
35.6	2	-16.72	258.8	126	52.1	482	250	120.92	705.2	374	189.74	928.4	498	258.88	1670	910	487.78
39.2	4	-15.61	262.4	128	53.21	485.6	252	122.03	708.8	376	190.85	932	500	260	1688	920	493.33
42.8	6	-14.5	266	130	54.32	489.2	254	123.14	712.4	378	191.96	935.6	502	261.11	1706	930	498.89
46.4	8	-13.39	269.6	132	55.43	492.8	256	124.25	716	380	193.07	939.2	504	262.22	1724	940	504.44
50	10	-12.28	273.2	134	56.54	496.4	258	125.36	719.6	382	194.18	942.8	506	263.33	1742	950	510
53.6	12	-11.17	276.8	136	57.65	500	260	126.47	723.2	384	195.29	946.4	508	264.44	1760	960	515.56
57.2	14	-10.06	280.4	138	58.76	503.6	262	127.58	726.8	386	196.4	950	510	265.55	1778	970	521.11
60.8	16	-8.95	284	140	59.87	507.2	264	128.69	730.4	388	197.51	953.6	512	266.66	1796	980	526.67
64.4	18	-7.84	287.6	142	60.98	510.8	266	129.8	734	390	198.62	957.2	514	267.77	1814	990	532.22
68	20	-6.73	291.2	144	62.09	514.4	268	130.91	737.6	392	199.73	960.8	516	268.88	1832	1000	537.78
71.6	22	-5.62	294.8	146	63.2	518	270	132.02	741.2	394	200.84	964.4	518	270			

$$^{\circ}\text{F} = (9/5 ^{\circ}\text{C}) + 32 \quad ^{\circ}\text{C} = 5/9 (^{\circ}\text{F} - 32)$$

REFERENCES

References > Pressure Units Cross Reference Chart

Pressure Units Cross Reference Chart

ELECTRONIC PRESSURE

PSI	atms.	H ₂ O	mm H ₂ O	cm H ₂ O	oz/in ²	Kg/cm ²	"Hg	mm Hg (Torr)	cm Hg	mbar	bar	Pa (Nm ²)	kPa	MPa
1	0.0681	27.71	703.8	70.38	16	0.0704	2.036	51.715	5.17	68.95	0.0689	6895	6.895	0.0069
14.7	1	407.2	10,343	1,034.3	235.1	1.033	29.92	760	76	1013	1.013	101,325	101.3	0.1013
0.0361	0.00246	1	25.4	2.54	0.5775	0.00254	0.0735	1.866	0.187	2.488	0.00249	248.8	0.249	0.00025
0.001421	0.000097	0.0394	1	0.1	0.0227	0.0001	0.00289	0.0735	0.00735	0.098	0.000098	9.8	0.0098	0.00001
0.01421	0.000967	0.3937	10	1	0.227	0.001	0.0289	0.735	0.0735	0.98	0.00098	98	0.098	0.0001
0.0625	0.00425	1.732	43.986	4.40	1	0.0044	0.1273	3.232	0.323	4.31	0.00431	431	0.431	0.00043
14.22	0.968	394.1	100,010	1,001	227.6	1	28.96	735.6	73.56	980.7	0.981	98,067	98.07	0.0981
0.4912	0.03342	13.61	345.7	34.57	7.858	0.0345	1	25.4	2.54	33.86	0.0339	3386	3.386	0.00339
0.01934	0.001316	0.536	13.61	1.361	0.310	0.00136	0.0394	1	.1	1.333	0.001333	133.3	0.1333	0.000133
0.1934	0.01316	5.358	136.1	13.61	3.10	0.0136	0.394	10	1	13.33	0.01333	1333	1.333	0.00133
0.0145	0.000987	0.4012	10.21	1.021	0.2321	0.00102	0.0295	0.75	0.075	1	0.001	100	0.1	0.0001
14.504	0.987	401.9	10,210	1021	232.1	1.02	29.53	750	75	1000	1	100,000	100	0.1
0.000145	0.00001	0.00402	0.102	0.0102	0.00232	0.00001	0.000295	0.0075	0.00075	0.01	0.00001	1	0.001	0.000001
0.14504	0.00987	4.019	102.07	10.207	2.321	0.0102	0.295	7.5	0.75	10	0.01	1,000	1	0.001
145.04	9.869	4019	102,074	10,207	2321	10.2	295.3	7500	750	10,000	10	1,000,000	1,000	1

To use this chart:

1. Find the column with the units you want to convert from.
2. Move down that column until you find the "1".
3. Staying in the same row, move horizontally to the column with the units you are converting to.
4. Multiply the number in that box by the amount you are changing from to get the converted value.

NOTES

WIKA Instrument LP
Pressure and Temperature Measurement
1000 Wiegand Boulevard
Lawrenceville, GA 30043
Toll Free 1-888-945-2872
Tel (770) 513-8200 • Fax (770) 338-5118
info@wika.com • www.wika.com

All specifications are subject to change without notice.

WIKA and the WIKAI design are trademarks and registered servicemarks of WIKA Instrument LP. ©2015 WIKA Instrument LP. All rights reserved.

